


### POMER-D Peak Capacity Performance

POWER-D I/O Connectors are designed for rugged / robust applications where both power & signal are required from a single connection. Featuring "Solid Pin" machined contacts, these connectors offer high reliability performance for the most challenging design applications



### **FEATURES & BENEFITS**

- Available in 12 industry standard sizes 3W3, 3W3K, 5W1, 5W5, 7W2, 8W8, 9W4 11W1, 13W3, 17W2, 21W1, 21WA4
- Solder cup, vertical mount, right angle, crimp & poke
- Screw machined contacts for high mating cycles
- Power contacts rated for 20/40 AMPs
- Signal contacts rated for 5 AMPs
- Inter-mates with most commercial equivalent products
- Cable assemblies available
- AVAILABLE IN IP67 SEAL-D VERSIONS



# NORCOMP

## **POWER-D**

#### Combined Power & Signal D-Subs

**Cable Mount** Solder Cup - Plug Solder Cup - Socket **Series** 680MYWY103LYY1 680MYWY203LYY1

Vertical Board Mount PCB Mount - Plug PCB Mount - Socket **Series** 681MYWY103LYY1 681MYWY203LYY1

**Right Angle Board Mount** PCB Mount - Plug PCB Mount - Socket

Crimp & Poke Cable Mount - Plug Cable Mount - Socket 684MYWY203L461

Series

684MYWY103L461


**Series** 680MYWY173LYY1 680MYWY273LYY1 Sizes

3W3, 3W3K, 5W1, 5W5 7W2, 8W8, 9W4 11W1 13W3, 17W2, 21W1, 21WA4

**Sizes** 3W3, 3W3K, 5W1, 5W5 7W2, 8W8, 9W4 11W1 13W3, 17W2, 21W1,

**Sizes** 3W3, 3W3K, 5W1, 5W5 7W2, 8W8, 9W4 11W1 13W3, 17W2, 21W1, 21WA4

**Sizes** 3W3, 5W5, 7W2, 9W4 13W3, 17W2, 21WA4

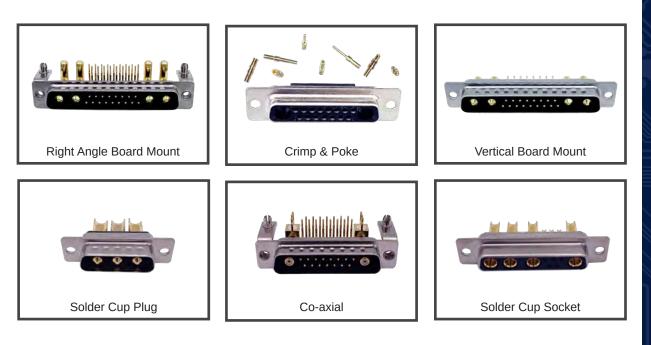



Peak Capacity Performance

Screw machined contacts for high mating cycles



Copyright© 2023