

SPECIFICATIONS:

MATERIALS:




HOUSING: PBT, UL94 V-0
 CONTACTS: GOLD FLASH PLATED BRASS
 SHELL: TIN PLATED STEEL

ELECTRICAL:

RATED CURRENT: 3A
 WORKING VOLTAGE: 250V
 INSULATION RESISTANCE: 1000 MOhms MIN.
 CONTACT RESISTANCE: 15 mOhms MAX.


ENVIRONMENT:

OPERATING TEMPERATURE: -55°C TO +105°C

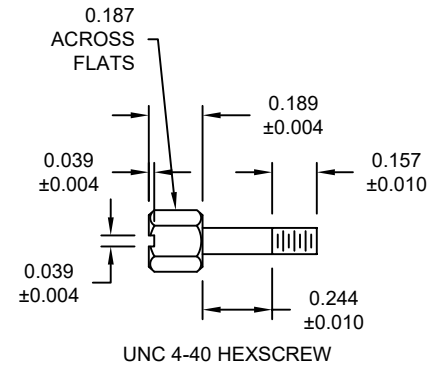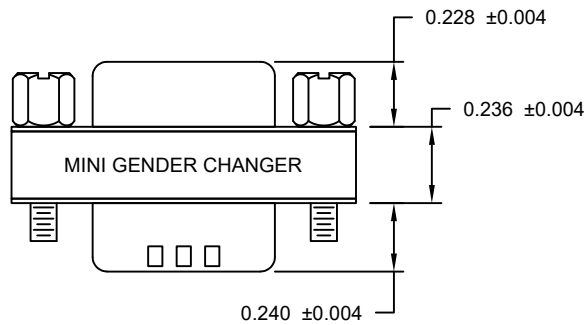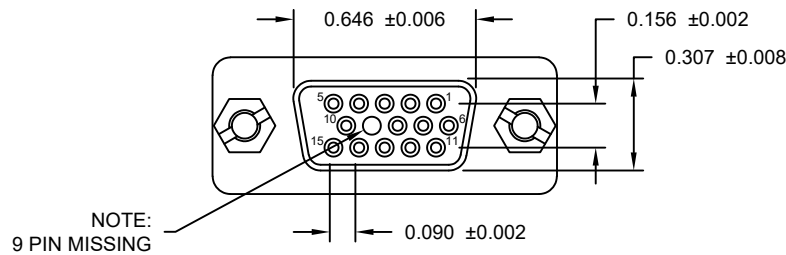

15-PIN MALE	15-PIN FEMALE
1	1
2	2
3	3
9	NO CONNECTION
14	14
15	15
SHELL	SHELL

PIN OUT

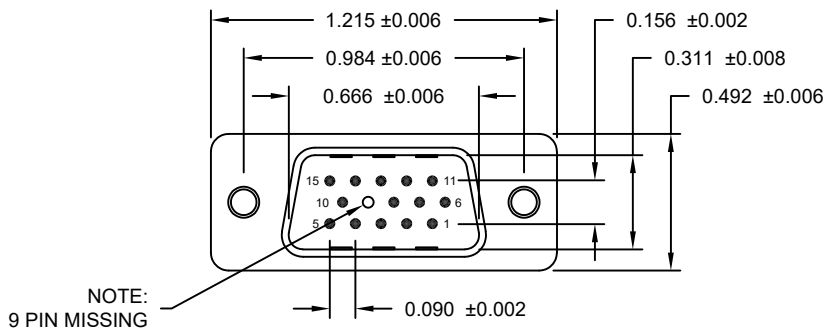

RoHS COMPLIANT

UNITS = inch [mm]

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
C. SMITH

DATE:
10/12/2007

NorComp

SCALE:
NTS

SHEET OF
1 1

REV
4

DWG NO.

GCHDLP15M15F