

DESCRIPTION: B SIZE CIRCULAR // MALE CABLE KIT // BAYONET

SPECIFICATIONS:

MATERIALS:

HOUSING: PA66, UL94 V-0, BLACK
CONTACTS: GOLD FLASH PLATED BRASS
GASKET & SEAL: SILICONE
CLAMP RING & SEALING NUT: PA66, UL94 V-0, BLACK

ELECTRICAL:



RATED CURRENT: SEE TABLE TO LEFT
RATED VOLTAGE: 250V
INSULATION RESISTANCE: 100 MOhms MIN.
CONTACT RESISTANCE: 10 mOhms MAX.

ENVIRONMENT:

OPERATING TEMPERATURE: -40°C TO +105°C
WATER PROOF: IP67

POSITIONS AVAILABLE				
NorComp Part Number	POSITIONS (MATING VIEW)		MAX AMPERAGE	MAX WIRE AWG
868-02A-103KIT	2A		10A	18AWG
868-03A-103KIT	3A		10A	18AWG
868-04A-103KIT	4A		10A	18AWG
868-02B-203KIT	2B		5A	24AWG
868-03B-203KIT	3B		5A	24AWG
868-04B-203KIT	4B		5A	24AWG
868-005-203KIT	5		5A	24AWG
868-006-203KIT	6		5A	24AWG
868-007-203KIT	7		5A	24AWG
868-008-203KIT	8		5A	24AWG

NOTE: 2A, 3A, & 4A MUST MATE WITH CORRESPONDING A SIZES
2B, 3B, & 4B MUST MATE WITH CORRESPONDING B SIZES

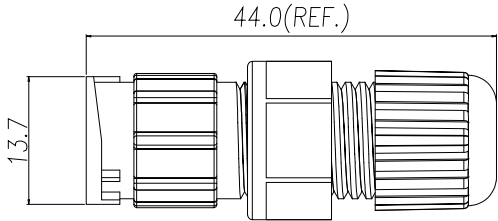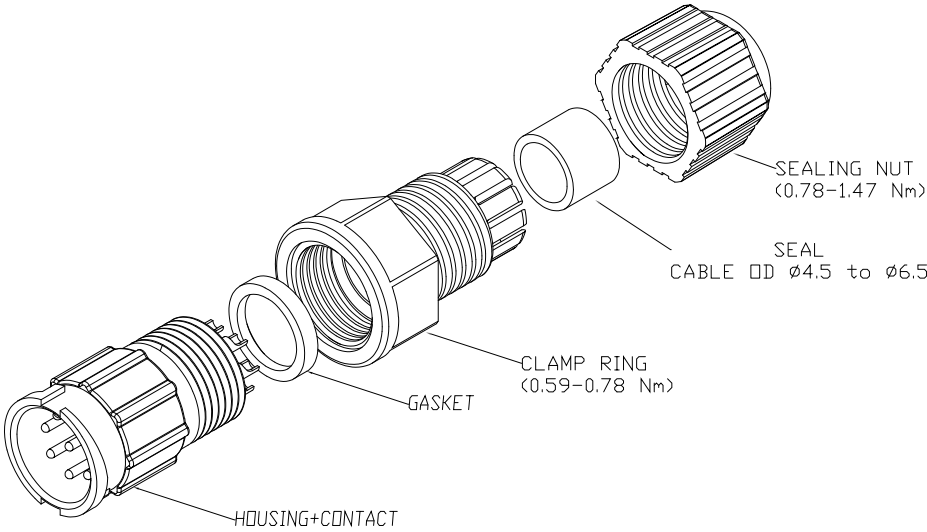

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: J. KADEL
DATE: 01/12/2026

UNITS = mm

DO NOT SCALE FROM DRAWING

NorComp

SCALE: NTS
DWG NO. 868-YYY-103KIT

SHEET 1 OF 1
REV 0