


DESCRIPTION: M12 // FEMALE // CABLE MOUNT 5P UNSHIELDED // HEX NUT KNURL

SPECIFICATIONS:



MATERIALS:
HOUSING: PBT, UL94 V-0, BLACK
CONTACTS: 10u" GOLD PLATED BRASS
NUT: NICKEL PLATED BRASS
ORING: EPDM, BLACK

ELECTRICAL:
RATED CURRENT: 4A
RATED VOLTAGE: 60V
INSULATION RESISTANCE: 100 MOhms MIN.
CONTACT RESISTANCE: 10 mOhms MAX.

ENVIRONMENT:
OPERATING TEMPERATURE: -40°C TO +85°C
WATER PROOF: IP67

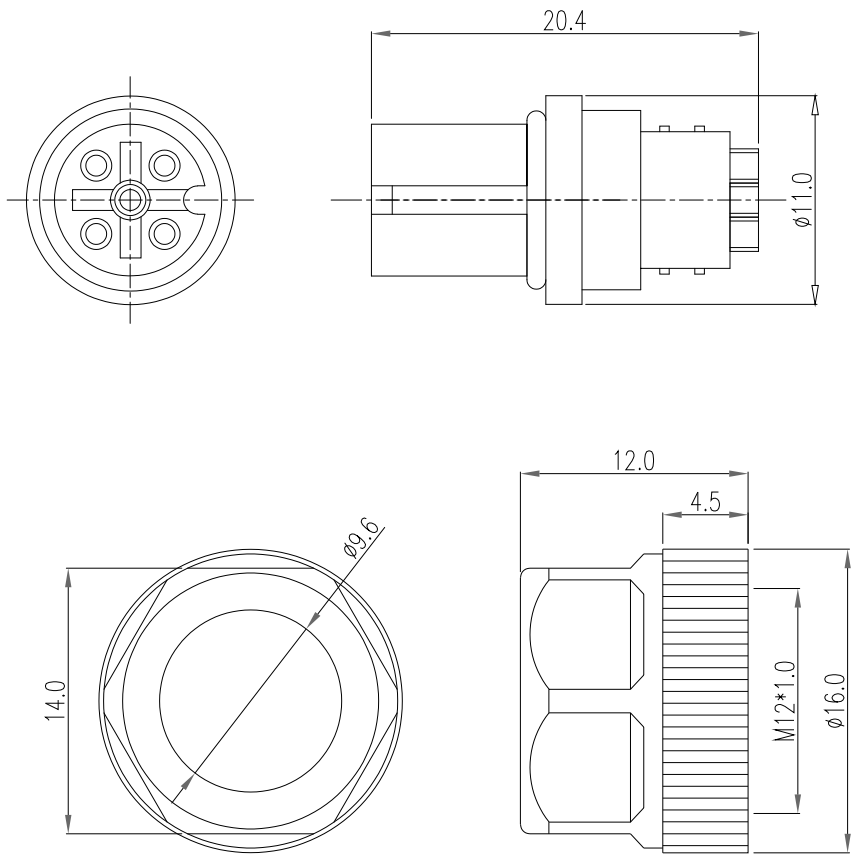

NUT

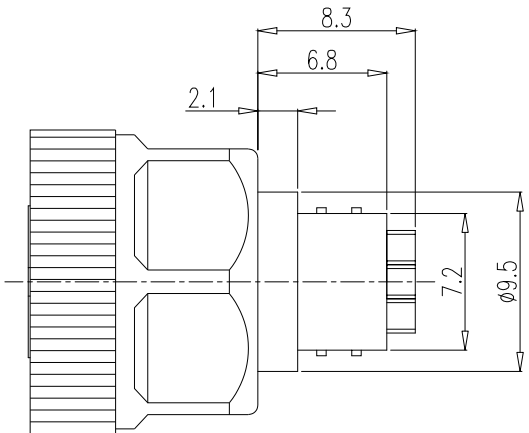

RoHS COMPLIANT

DRAWN:
J. KADEL
DATE:
12/02/2025

UNITS = mm

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

NorComp

SCALE: NTS SHEET 1 OF 1 REV 0

DWG NO. 858-005-203FSU4