

Ø10.7

MATERIALS:

HOUSING:

PBT, UL94 V-0, BLACK 10μ" GOLD PLATED BRASS

CONTACTS: NUT:

NICKEL PLATED BRASS

ORING:

EPDM, BLACK

ELECTRICAL:

RATED CURRENT: RATED VOLTAGE:

SPECIFICATIONS:

1.5A

30V INSULATION RESISTANCE: 100 MOhms MIN.

CONTACT RESISTANCE:

ENVIRONMENT:

OPERATING TEMPERATURE:

-40°C TO +85°C


10 mOhms MAX.

WATER PROOF:

IP67

MAX WIRE AWG:

26 AWG




26.0

24.0

20.0

14.7

1.0

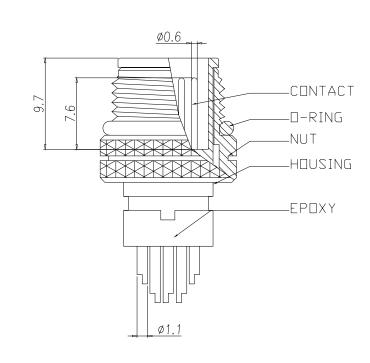

ROHS COMPLIANT

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: J. KADEL

DATE:

12/11/2023

UNITS = mm

DO NOT SCALE FROM DRAWING SCALE: REV SHEET OF

0

NorComp

NTS 1 DWG NO. 858-017-103RSU4