
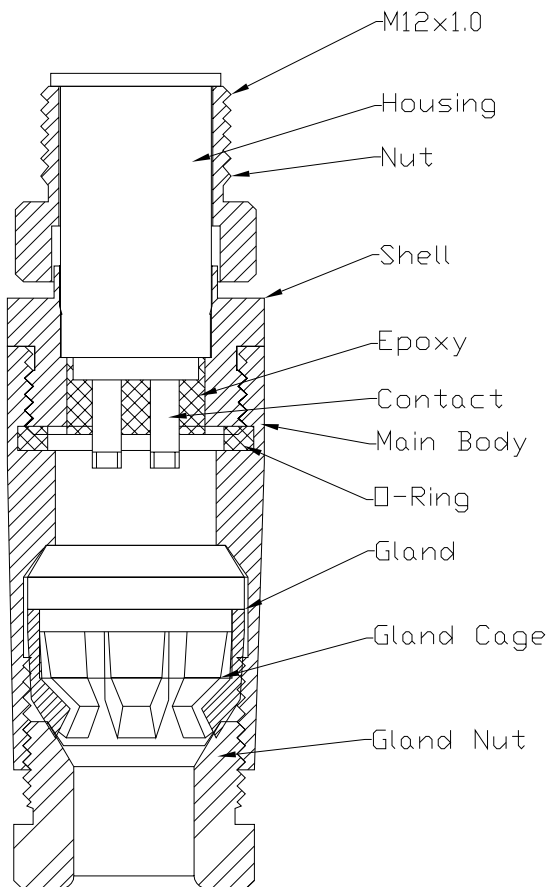


DESCRIPTION: M12, 5 Position, Male, B Code, Solder Cup, Cable Kit

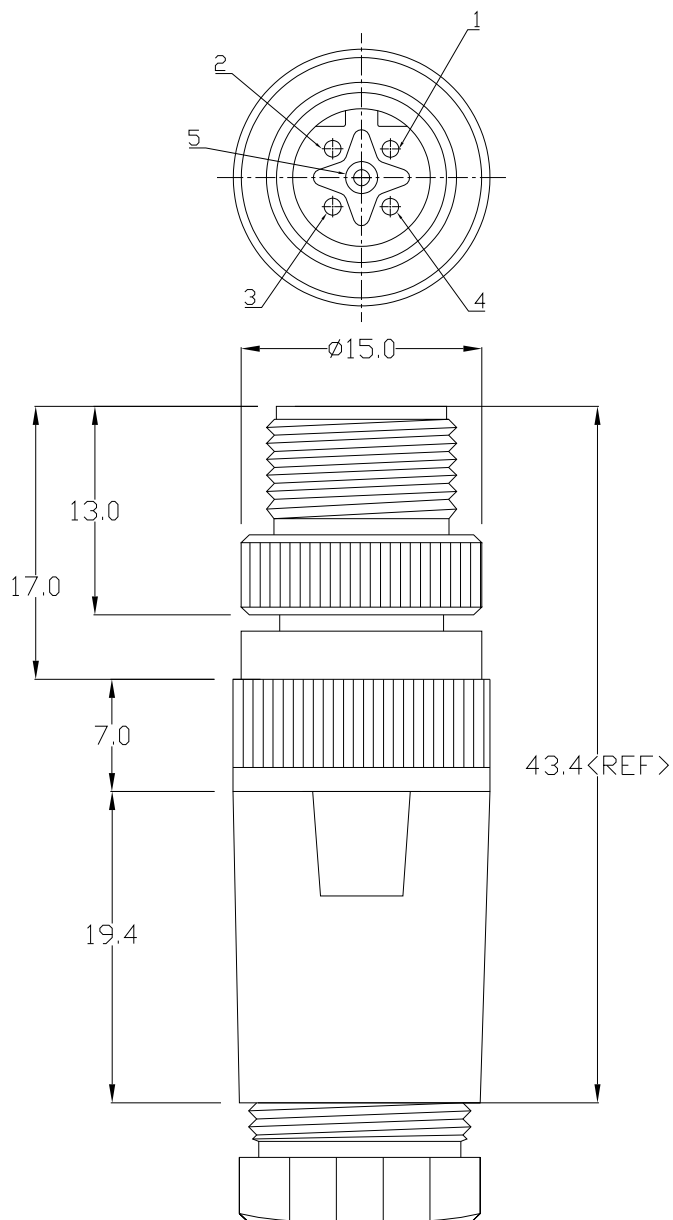

NOTE:

MATERIAL

Housing:	PBT UL94V-0, BLACK
Contact:	BRASS
Shell:	Aluminum Alloy
Main Body:	Aluminum Alloy
Gland:	Silicone, Black
Gland Cage:	POM, Black
Gland Nut:	Aluminum Alloy
O-Ring:	SILICONE, BLACK

FINISH

Contact:	10u" Gold
Under Plate:	Nickel
Nut	Nickel
Shell:	Nickel
Main Body:	Nickel
Gland Nut:	Nickel

ELECTRICAL

Rated Current:	4A
Rated Voltage:	60V
Insulator Resistance:	100 MΩhms MIN.
Contact Resistance:	10 mΩhms MAX.
Water Proof:	IP67

ENVIRONMENT

Operating Temp.:	-40°C TO +85°C
MAX WIRE AWG:	22

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

A. Joyner

DATE:

11/6/2020

Tolerance

.X ±0.20

.XX ±0.10

.XXX ±0.05

UNITS = mm

DO NOT SCALE FROM DRAWING

NorComp

SCALE:

NTS

SHEET

OF

1

1

REV

3

DWG NO.

858-B05-103RKT4