

DESCRIPTION: M12 // 3P // ROTATED // CABLE MOUNT // SHEILDED

SPECIFICATIONS:

MATERIALS:

HOUSING: PBT, UL94 V-0, BLACK
CONTACTS: 10u" GOLD PLATED BRASS
NUT: NICKEL PLATED BRASS
SHELL: BRIGHT TIN PLATED BRASS
ORING: EPDM

ELECTRICAL:



RATED CURRENT: 4A
RATED VOLTAGE: 250V
INSULATION RESISTANCE: 100 MOhms MIN.
CONTACT RESISTANCE: 10 mOhms MAX.

ENVIRONMENT:

OPERATING TEMPERATURE: -40°C TO +85°C
WATER PROOF: IP67

NORCOMP MATING PART NUMBERS:

858-L03-203RKT4*
858-R03-203RSS4*
858-R03-203RSU4*
859-L03-203R004*
860-003-213R004*
861-L03-213R004*
*Also all material and contact plating variants

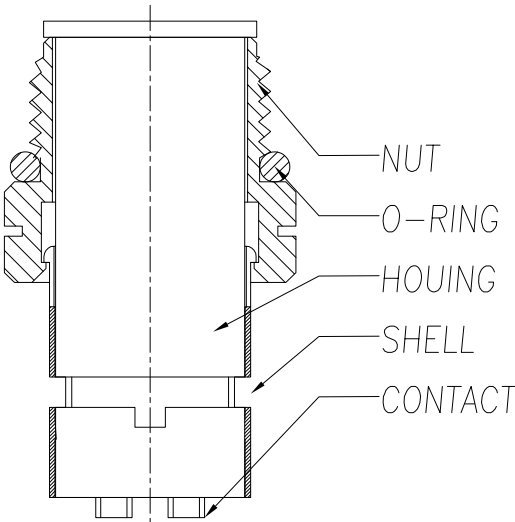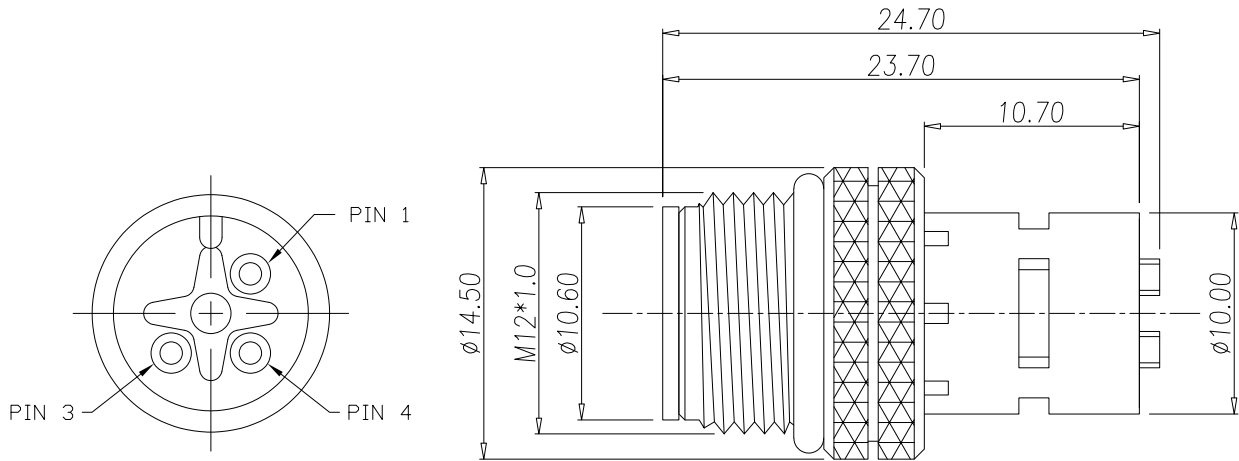

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: J. KADEL
DATE: 10/02/2023

UNITS = mm

DO NOT SCALE FROM DRAWING

NorComp

SCALE: NTS	SHEET 1 OF 1	REV 0
DWG NO.	858-R03-103RSS4	