

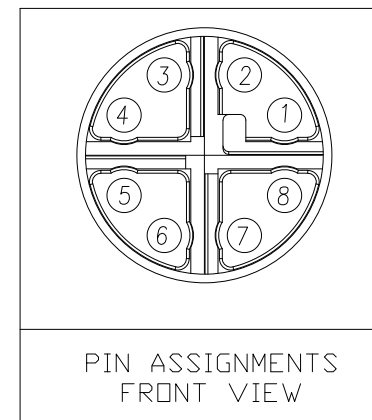
## NOTE:

## MATERIAL

HOUSING:	PBT UL94V-0, BLACK
CONTACT:	10 $\mu$ " GOLD PLATED BRASS
SHELL:	NICKEL PLATED BRASS
NUT:	ALUMINUM ALLOY
ORING:	EPDM, BLACK
GROUND:	NICKEL PLATED BRASS
XSHELL:	NICKEL PLATED ZINC ALLOY
MAIN BODY:	ALUMINUM ALLOY
GLAND:	SILICONE, BLACK
GLAND CAGE:	POM, WHITE
GLAND NUT:	ALUMINUM ALLOY

## ELECTRICAL

RATED CURRENT:	0.5A
RATED VOLTAGE:	50VAC/60VDC
INSULATION RESISTANCE:	100 M $\Omega$ hms MIN.
CONTACT RESISTANCE:	10 m $\Omega$ hms MAX.
WATER PROOF:	IP67
ENVIRONMENT	
OPERATION TEMPERATURE:	-40°C TO +85°C

PIN ASSIGNMENTS  
FRONT VIEW

RoHS COMPLIANT

UNITS = mm

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

J. KADEL

DATE:

02/18/2022

NorComp

SCALE:

NTS

SHEET

OF  
1 1

REV

0

DWG NO.

858-X08-103RKT4