

DESCRIPTION: M12 MALE // 8P X-CODE // RA CABLE MOUNT // ANTI-VIBRATION

SPECIFICATIONS:

MATERIALS:


HOUSING: PBT, UL94 V-0, BLACK
CONTACTS: 10u" GOLD PLATED BRASS
NUT: NICKEL PLATED BRASS
SHELL: ZINC ALLOY

ELECTRICAL:

RATED CURRENT: 0.5A
RATED VOLTAGE: 50VAC/60VDC
INSULATION RESISTANCE: 100 MOhms
CONTACT RESISTANCE: 10 mOhms
MAX WIRE AWG: 24

ENVIRONMENT:

OPERATING TEMPERATURE: -40°C TO +85°C
WATER PROOF: IP67

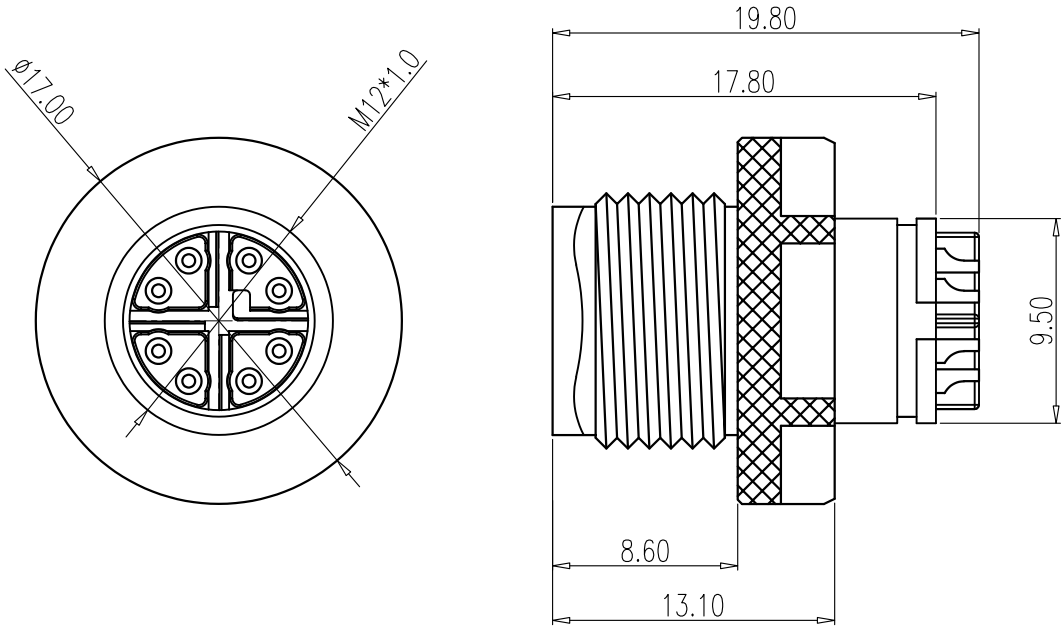

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

J. KADEL

DATE:

10/24/2022

UNITS = mm

DO NOT SCALE FROM DRAWING

NorComp

SCALE:
NTS

SHEET 1 OF 1

REV
0

DWG NO.

858VX08-103RLS4