

NUT

NOTE:

MATERIAL

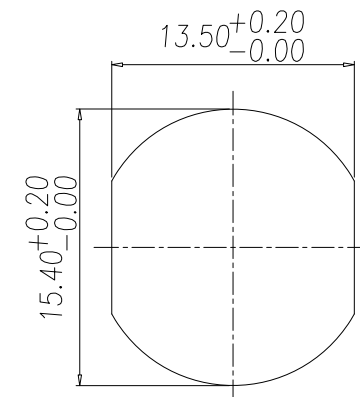

HOUSING:	PBT UL94V-0, BLACK
CONTACT:	10u" GOLD PLATED BRASS
SHELL:	NICKEL PLATED BRASS
NUT:	NICKEL PLATED BRASS
O-RING:	EPDM

ELECTRICAL

RATED CURRENT:	4A
RATED VOLTAGE:	250V
INSULATOR RESISTANCE:	100 MΩhms MIN.
CONTACT RESISTANCE:	10 mΩhms MAX.
WATER PROOF:	IP67

ENVIRONMENT

OPERATION TEMPERATURE:	-40°C TO +85°C
------------------------	----------------

RECOMMEND PANEL CUT-OUT

RoHS COMPLIANT

UNITS = mm

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

J. KADEL

DATE:

01/26/2022

NorComp

SCALE:

NTS

SHEET

OF

1

1

REV

0

DWG NO.

859-005-103RP94