
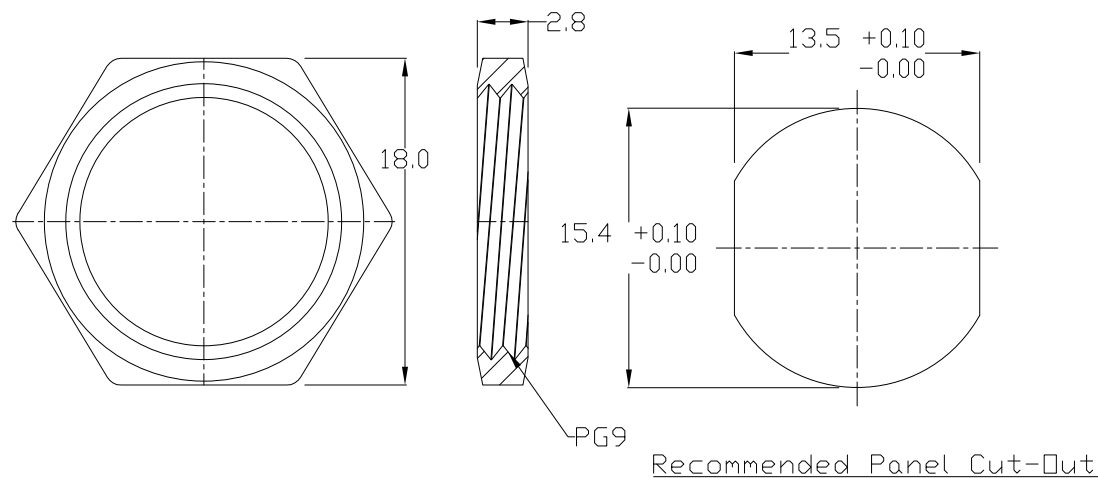


DESCRIPTION: M12, 6 Position, Female, A Code, Solder Cup, Panel Mount

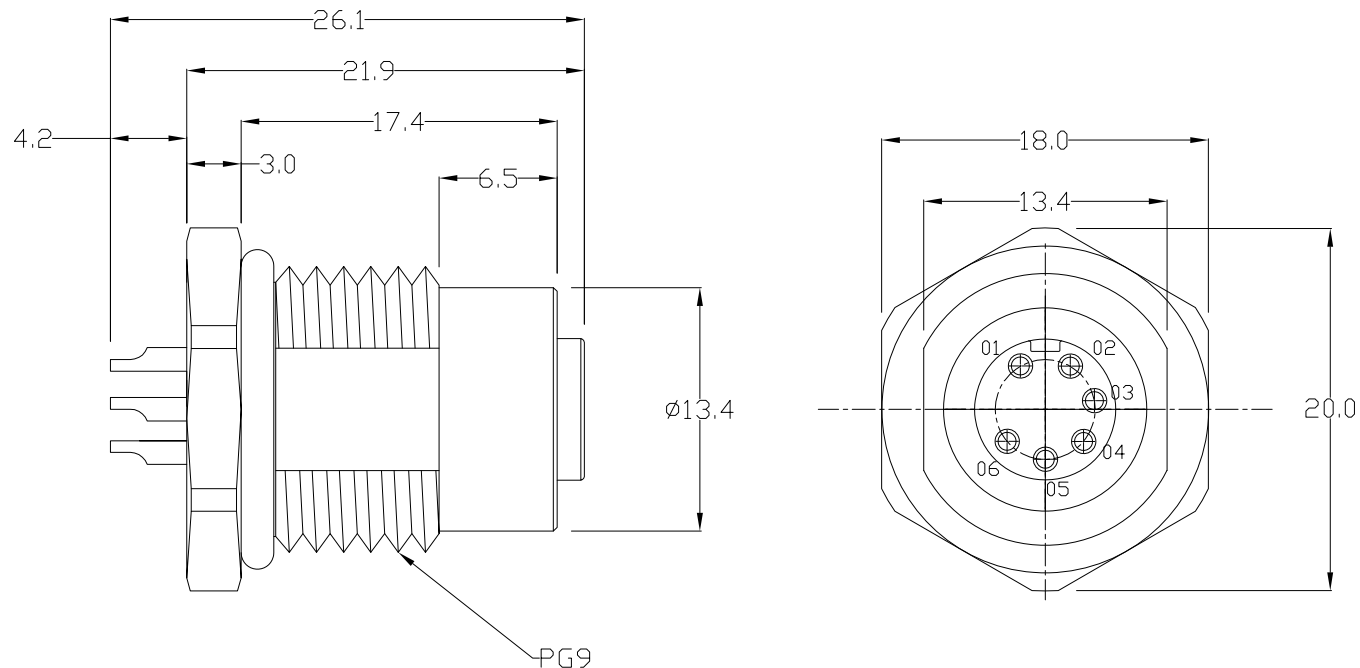

NOTE:

MATERIAL

Housing: PBT UL94V-0, BLACK
 Contact: BRASS
 Shell: BRASS
 Nut: BRASS
 O-Ring: EPDM, BLACK

FINISH

Contact: 10u" GOLD PLATED
 Under Plate: NICKEL
 Nut: NICKEL
 Shell: NICKEL

ELECTRICAL

Rated Current: 2A
 Rated Voltage: 30V
 Insulator Resistance: 100 MOhms MIN.
 Contact Resistance: 10 mOhms MAX.
 Water Proof: IP67

ENVIRONMENT

Operating Temp.: -40°C TO +85°C

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

A. Joyner

DATE:

10/30/2020

Tolerance

.X ±0.20

.XX ±0.10

.XXX ±0.05

UNITS = mm

DO NOT SCALE FROM DRAWING

NorComp

SCALE:

NTS

SHEET

OF

1

1

REV

1

DWG NO.

859-006-203R004