

DESCRIPTION: M12 MALE - REAR MOUNT - SOLDER CUP - 5 POS.

NOTE:

MATERIAL

HOUSING: PBT UL94V-0, BLACK  
CONTACT: BRASS  
SHELL: BRASS  
NUT: BRASS  
O-RING: EPDM, BLACK

FINISH



CONTACT: GOLD PLATED  
OVER 50µ" NICKEL  
SHELL: NICKEL PLATED  
NUT: NICKEL PLATED

ELECTRICAL:

RATED CURRENT: 5A  
RATED VOLTAGE: 125V  
INSULATION RESISTANCE: 100 MΩhms MIN.  
CONTACT RESISTANCE: 10 MΩhms MAX.  
WATER PROOF: IP67



ENVIRONMENT:

OPERATION TEMPERATURE: -40°C TO +80°C

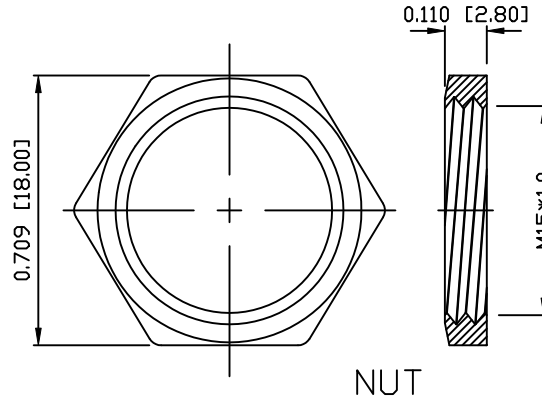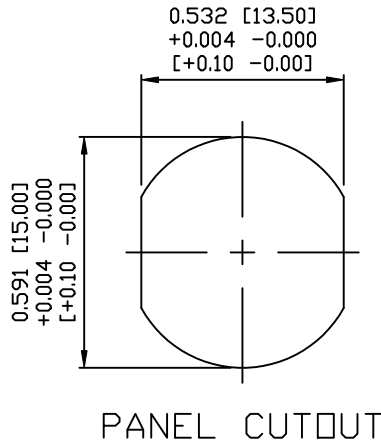

859-R05-103R00Y

1 = GOLD FLASH  
4 = 10µ" GOLD

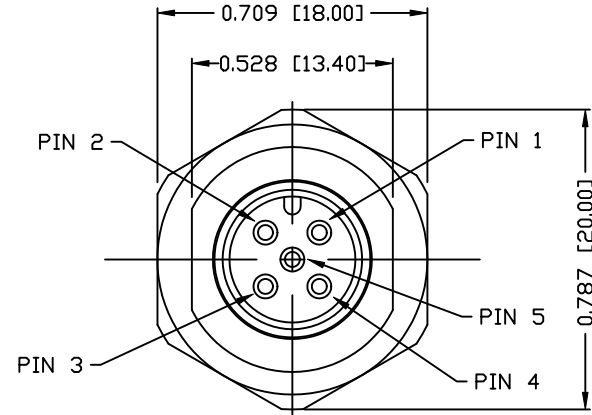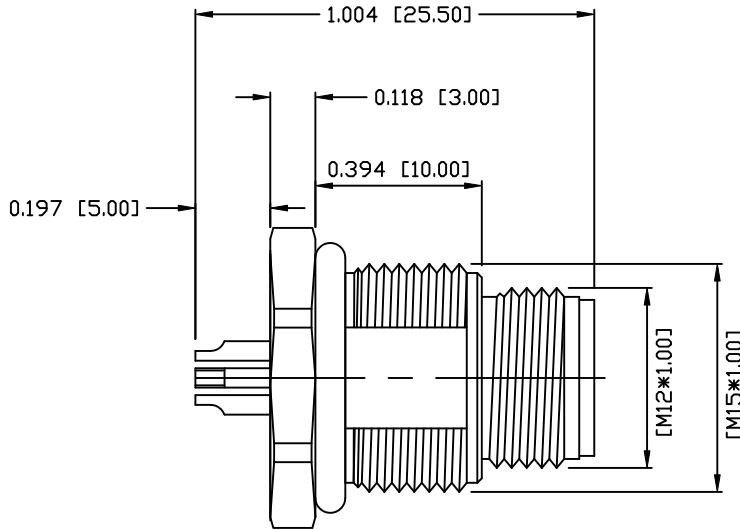

RoHS COMPLIANT

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:  
M. SIGMON

DATE:  
06-20-16

CHECKED:

DATE:

NorComp

SCALE:  
N.T.S.

SHEET 1 OF 1

REV 1

DWG NO.

859-R05-103R00Y