

DESCRIPTION: M12 MALE - REAR MOUNT - SOLDER CUP - 8 POS.

NOTE:

MATERIAL

HOUSING:
CONTACT:
SHELL
NUT:
O-RING:

PBT UL94V-0, BLACK
BRASS
BRASS
BRASS
EPDM, BLACK



FINISH
CONTACT:

GOLD PLATED
OVER 50µ" NICKEL
NICKEL PLATED
NICKEL PLATED

SHELL:
NUT



ELECTRICAL:

RATED CURRENT: 5A
RATED VOLTAGE: 125V
INSULATION RESISTANCE: 100 MΩhms MIN.
CONTACT RESISTANCE: 10 MΩhms MAX.
WATER PROOF: IP67
ENVIRONMENT:
OPERATION TEMPERATURE: -40°C TO +80°C

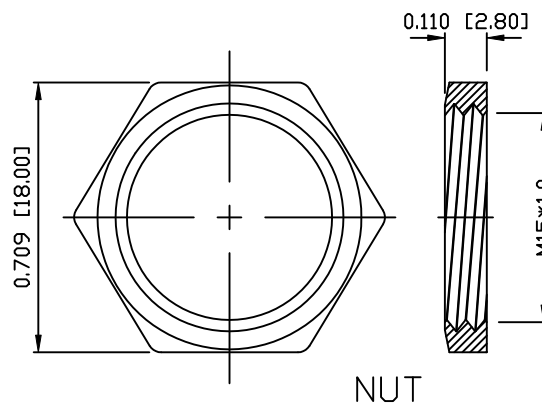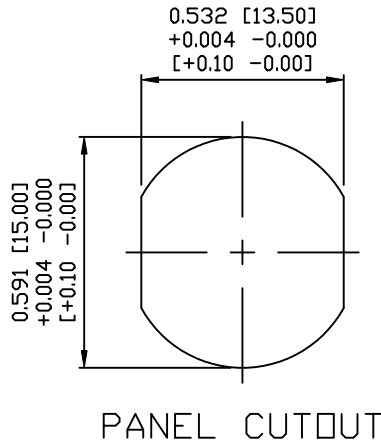

859-R08-103R00Y

1 = GOLD FLASH
4 = 10µ" GOLD

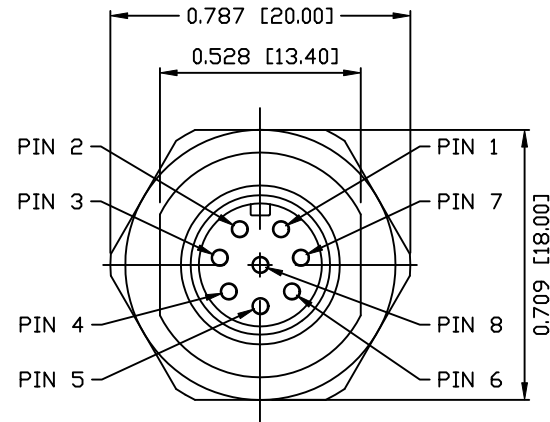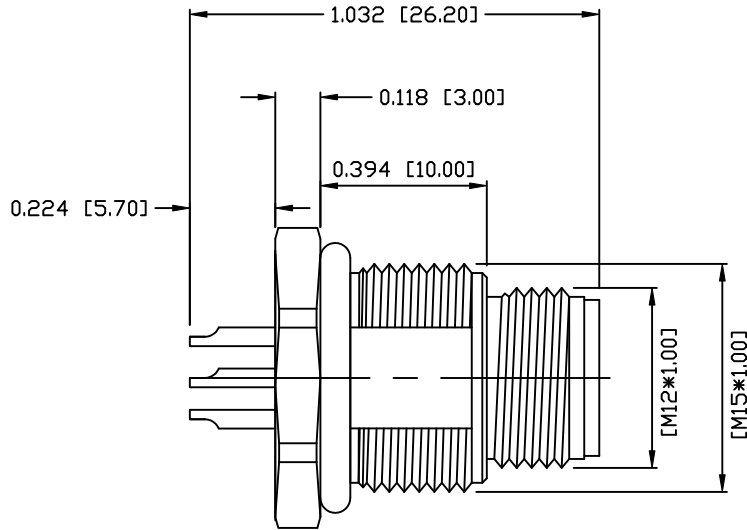

RoHS COMPLIANT

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
M. SIGMON

DATE:
06-20-16

CHECKED:

DATE:

NorComp

SCALE:
N.T.S.

SHEET 1 OF 1

REV 1

DWG NO.

859-R08-103R00Y