



DESCRIPTION: M12 FEMALE - 12 POS. - W/O NUT AND SHOULDER

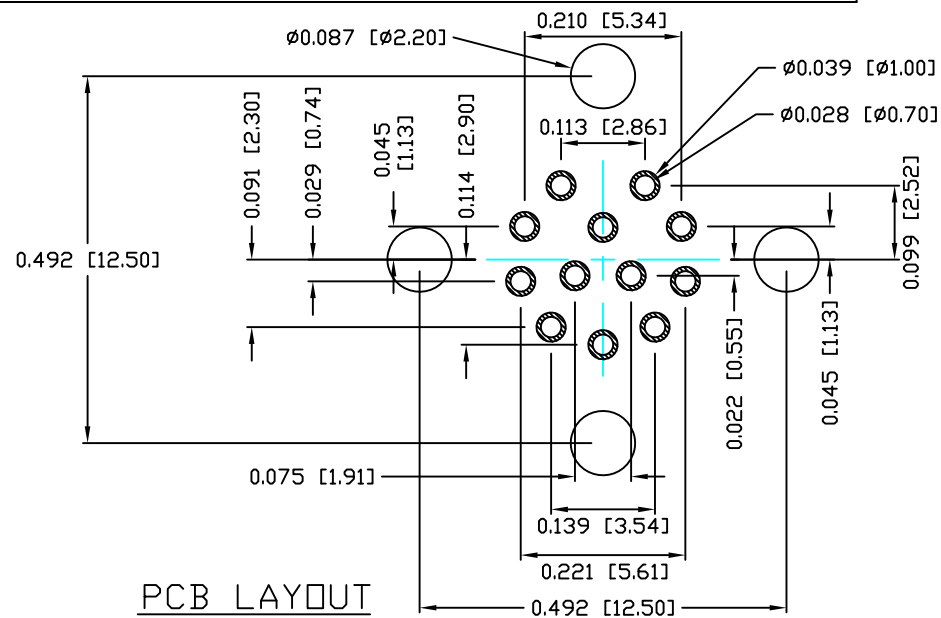


PCB LAYOUT

SCALE : 4:1

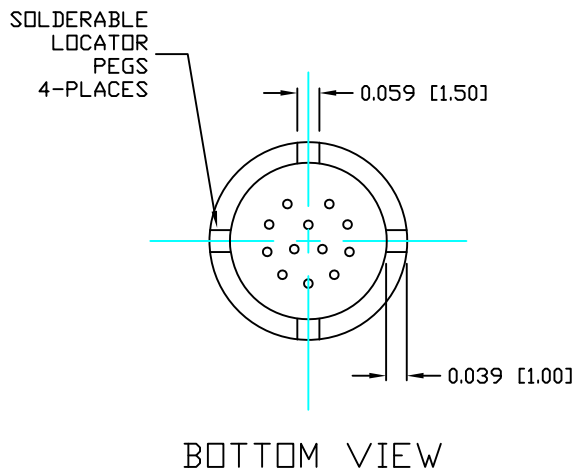

BOTTOM VIEW

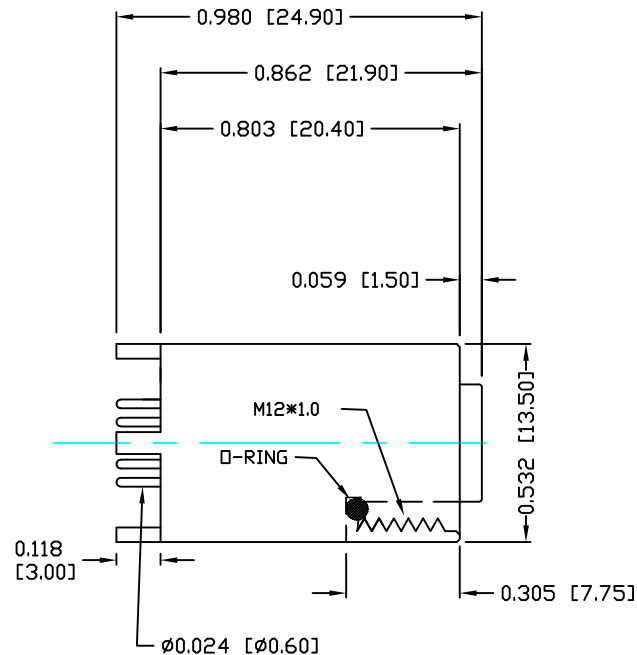

NOTE:

MATERIAL

HOUSING:

CONTACT:

SHELL:

O-RING:

FINISH

CONTACT:

SHELL:

ELECTRICAL

RATED CURRENT:

RATED VOLTAGE:

INSULATION RESISTANCE:

CONTACT RESISTANCE:

WATER PROOF:

ENVIRONMENT

OPERATION TEMPERATURE:

PBT UL94V-0, BLACK

BRASS

BRASS

EPDM, BLACK

GOLD FLASH

OVER 50μ" NICKEL

NICKEL PLATED

1A


30V

100 mΩhms MIN.

10 MΩhms MAX.

IP67

-40°C TO +85°C

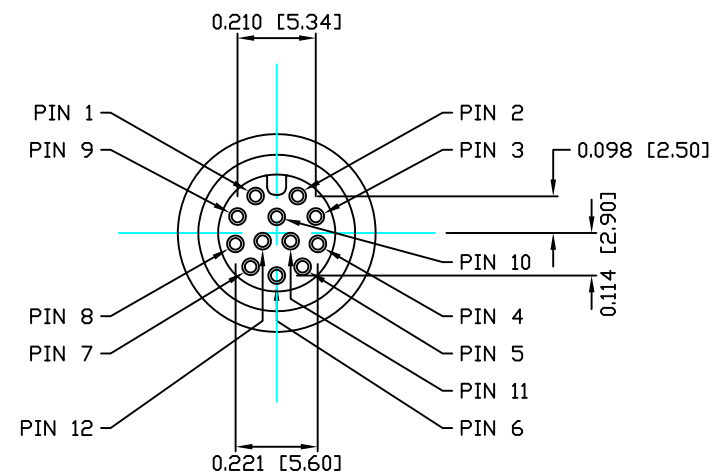

RoHS COMPLIANT

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

M. SIGMON

DATE:

10-13-16

CHECKED:

DATE:

NorComp

SCALE:

N.T.S.

SHEET

1

OF

1

REV

2

DWG NO.

860-012-S23R001