





SPECIFICATIONS:

MATERIALS:
HOUSING: PA9T, UL94 V-0, BLACK
CONTACTS: GOLD FLASH PLATED BRASS
GROUND: NICKEL PLATED PHOSPHOR BRONZE
ORING: VITON
CAP: PA66

ELECTRICAL:
RATED CURRENT: 1.5A
RATED VOLTAGE: 30V
INSULATION RESISTANCE: 100 MOhms MIN.
CONTACT RESISTANCE: 10 mOhms MAX.

ENVIRONMENT:
OPERATING TEMPERATURE: -40°C TO +85°C
WATER PROOF: IP67 (Mated Condition)

MUST PURCHASE PART NUMBER
"862-M-SHELL" SEPARATELY

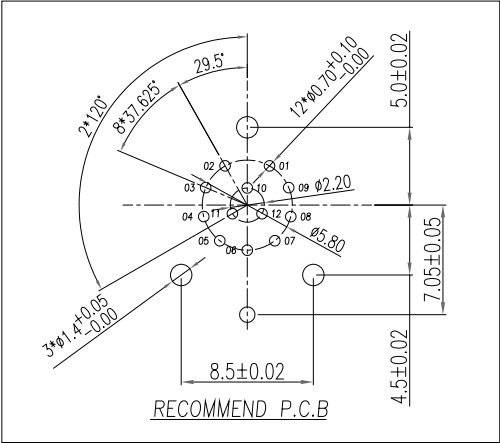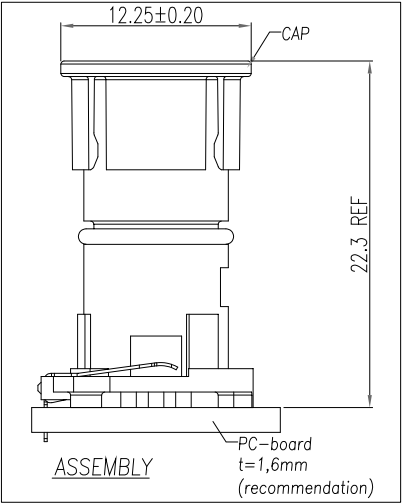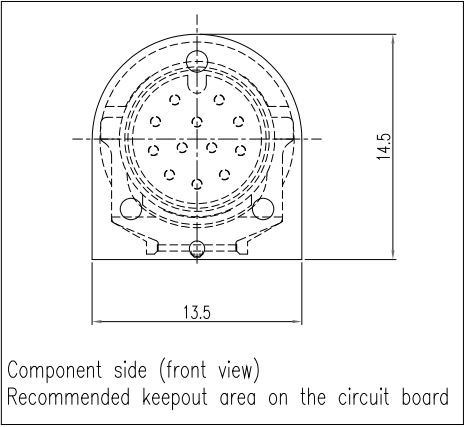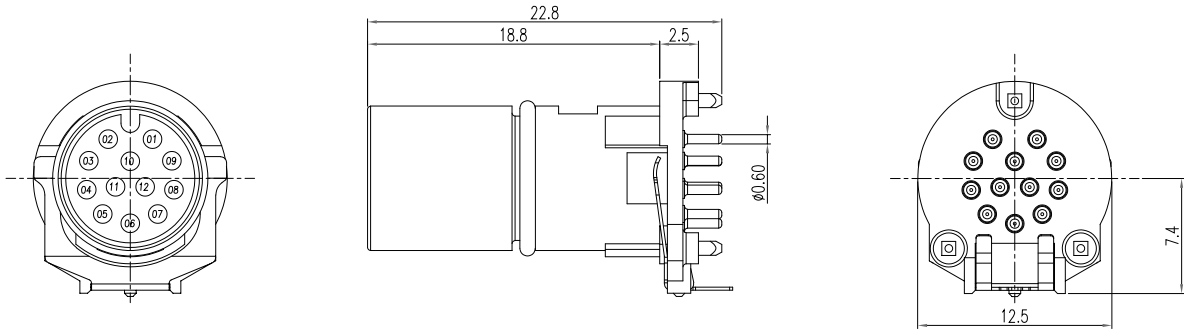

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: J. KADEL
DATE: 07/17/2025

UNITS = mm

DO NOT SCALE FROM DRAWING

NorComp


SCALE: NTS

DWG NO.

SHEET 1 OF 2

862-012-113R001

REV 0

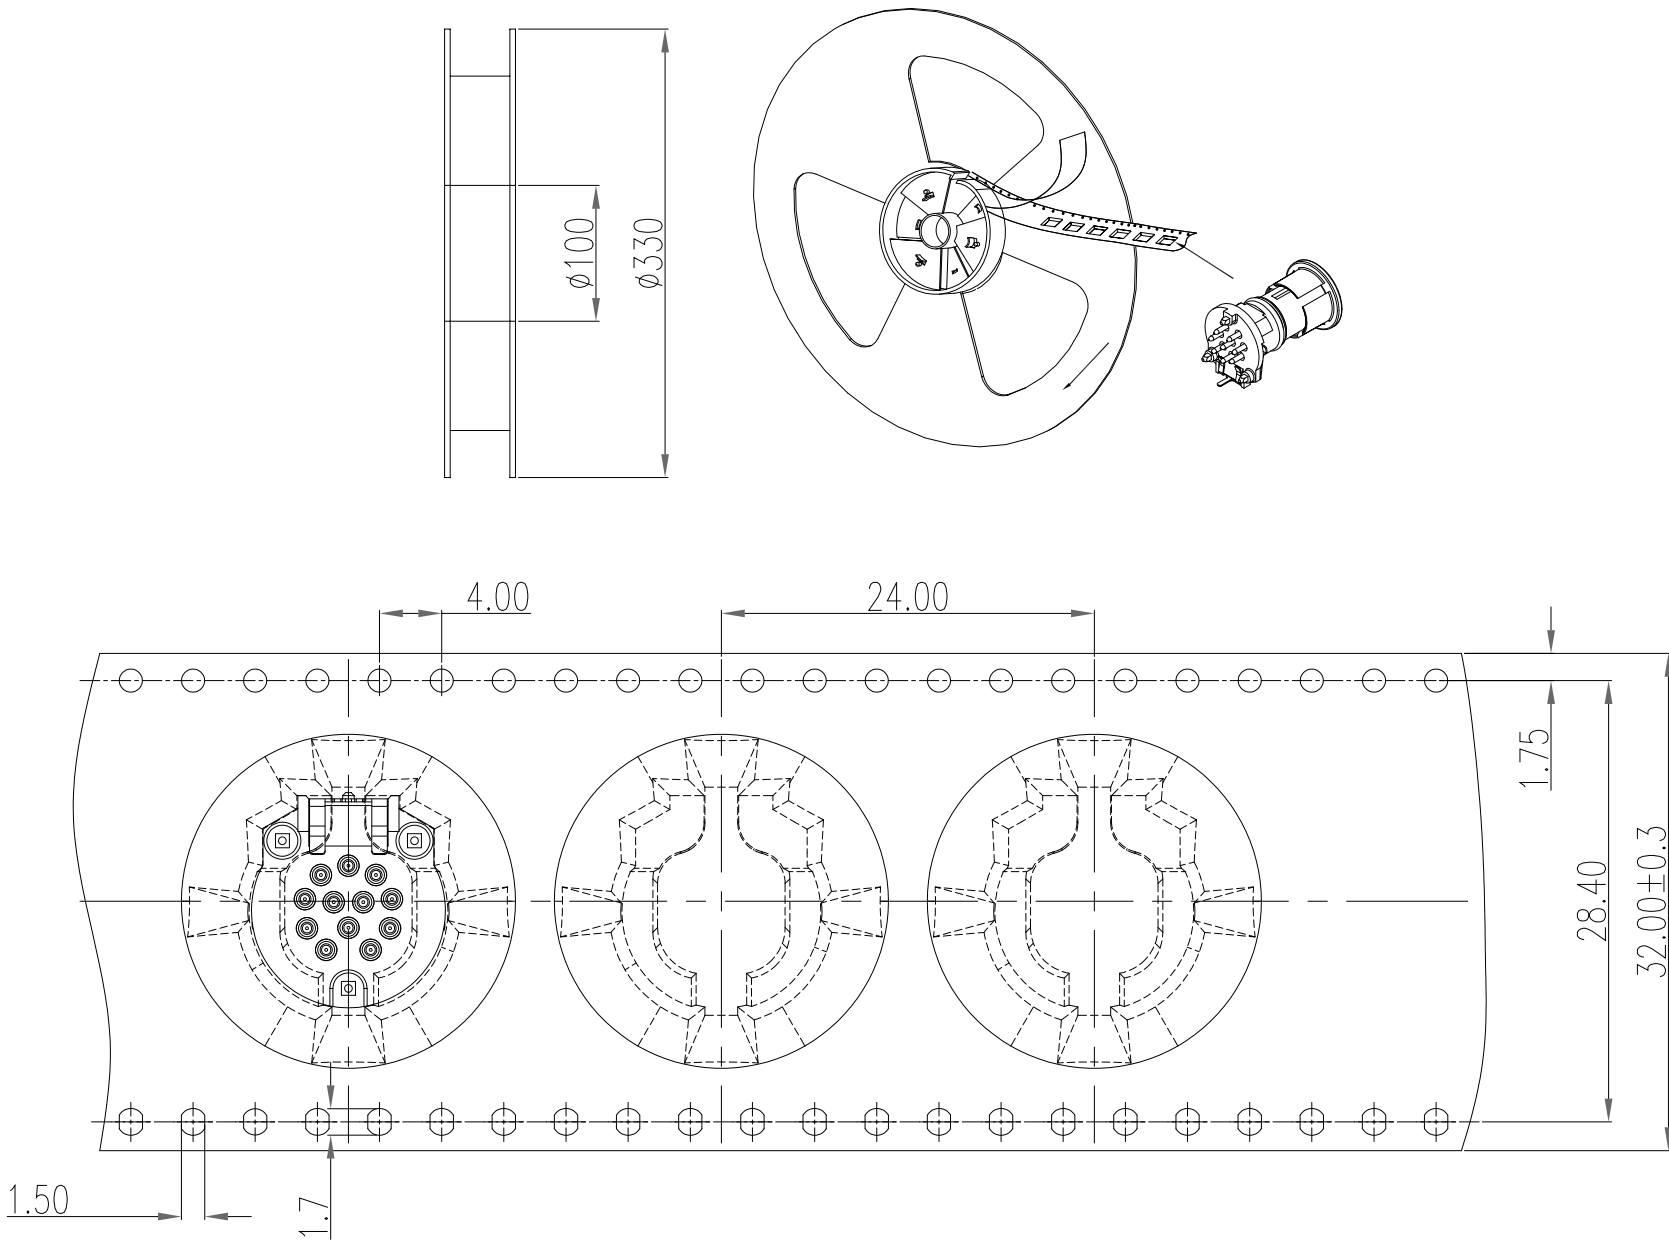

The tape size complies with the (EIA-481-D) specification requirements.

RoHS COMPLIANT

DRAWN:
J. KADEL
DATE:
07/17/2025

UNITS = mm

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

NorComp

SCALE: NTS SHEET 2 OF 2 REV 0

DWG NO. 862-012-113R001