


SPECIFICATIONS:




**MATERIALS:**  
HOUSING: PA9T, UL94 V-0, BLACK  
CONTACTS: GOLD FLASH PLATED BRASS  
GROUND: NICKEL PLATED PHOSPHOR BRONZE  
ORING: VITON  
CAP: PA66

**ELECTRICAL:**  
RATED CURRENT: 4A  
RATED VOLTAGE: 250V  
INSULATION RESISTANCE: 100 MOhms MIN.  
CONTACT RESISTANCE: 10 mOhms MAX.

**ENVIRONMENT:**  
OPERATING TEMPERATURE: -40°C TO +85°C  
WATER PROOF: IP67 (Mated Condition)

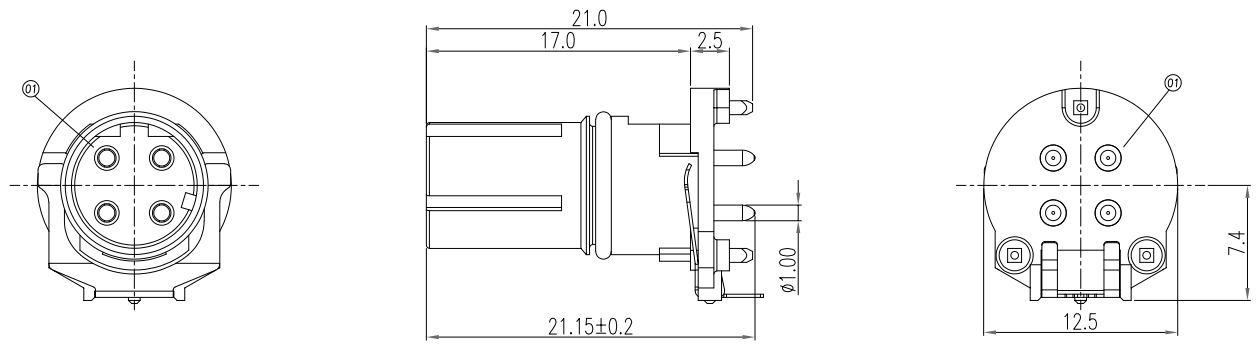

MUST PURCHASE PART NUMBER  
"862-F-SHELL" SEPARATELY

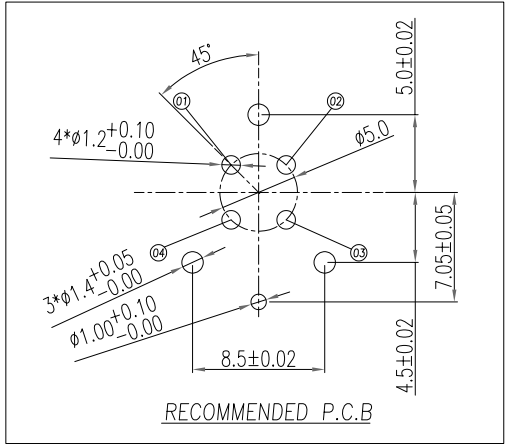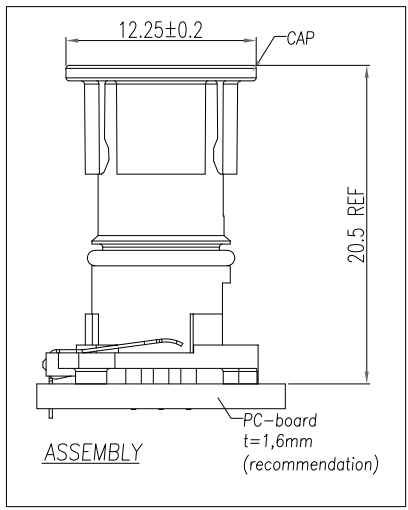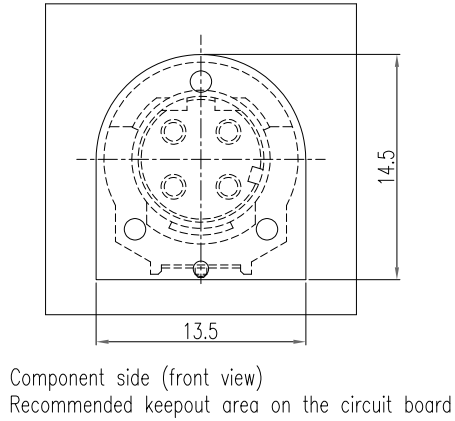

RoHS COMPLIANT




THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: J. KADEL  
DATE: 03/18/2024

UNITS = mm

DO NOT SCALE FROM DRAWING

SCALE: NTS	SHEET 1 OF 2	REV 0
DWG NO. 862-D04-213R001		

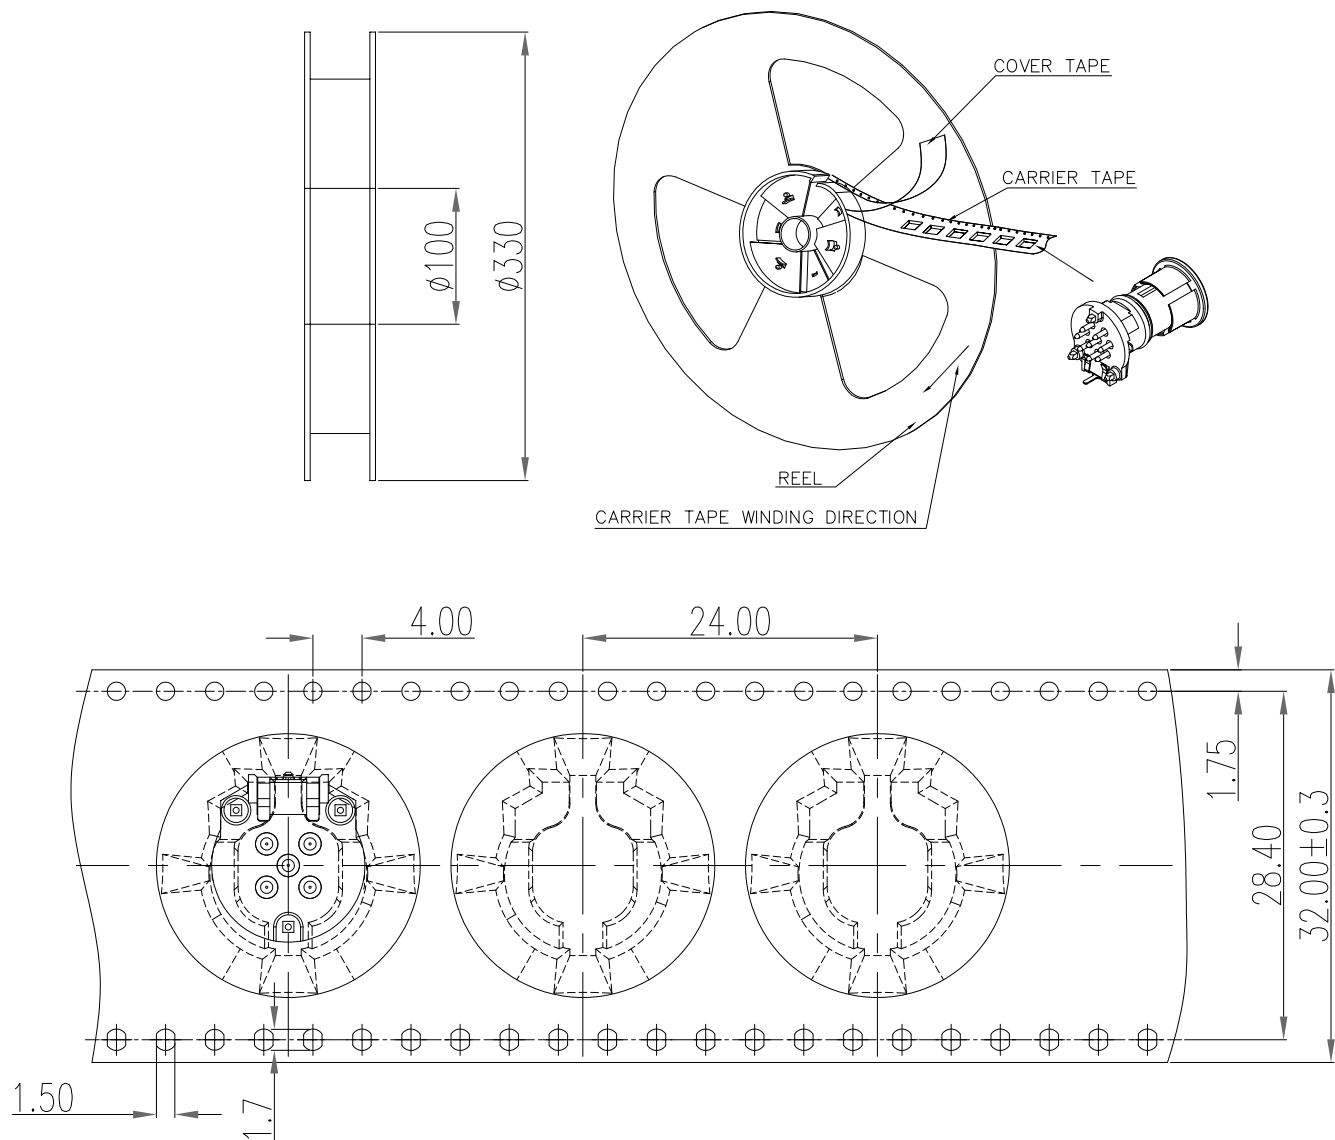

The tape size complies with the (EIA-481-D) specification requirements.

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

J. KADEL

DATE:

03/18/2024

UNITS = mm

DO NOT SCALE FROM DRAWING

NorComp

SCALE:

NTS

SHEET

OF

2

2

REV

0

DWG NO.

862-D04-213R001