



SPECIFICATIONS:

MATERIALS:	
SHELL:	NICKEL PLATED BRASS
ORING A:	EPDM
ORING B:	VITON
NUT:	NICKEL PLATED BRASS

ENVIRONMENT:	
OPERATING TEMPERATURE:	-40°C TO +85°C
WATER PROOF:	IP67 (Mated Condition)

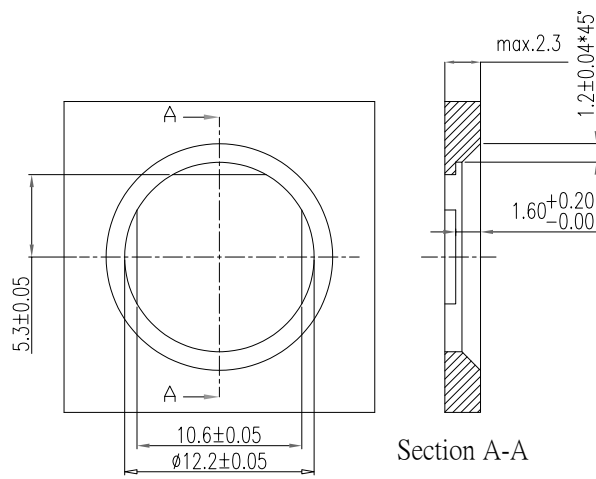


Panel Cut Out Recommendation

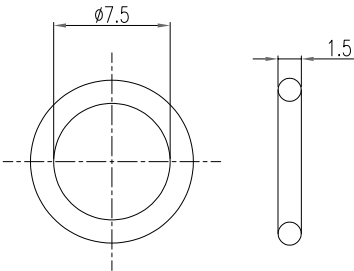


O-RING B

MOUNT NUT TO PANEL FIRST BEFORE INSERTING CONNECTOR. WHEN INSERTING CONNECTOR, ENSURE NUT IS PUSHED FULLY ONTO CONNECTOR. AFTER INSTALLATION OF CONNECTOR INSTALL O-RING B ONTO CONNECTOR MATING SIDE, PUSH O-RING DOWN INTO SHELL WITH A MATING CONNECTOR.

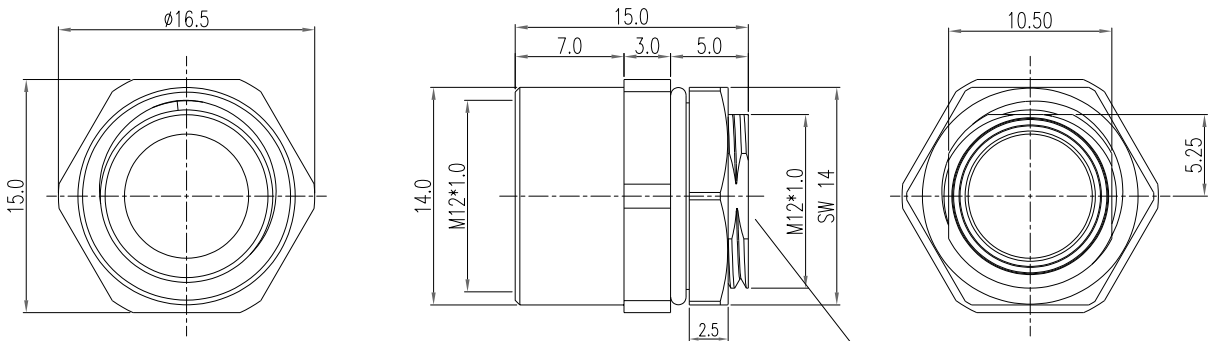

SHELL+O-RING A+NUT

INSERT CONNECTOR MATING END HERE

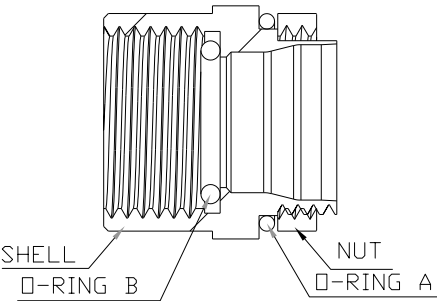

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

J. KADEL

DATE:

03/18/2024

UNITS = mm

DO NOT SCALE FROM DRAWING

NorComp

SCALE:

NTS

SHEET

OF

1

2

REV

0

DWG NO.

862-F-SHELL