

DESCRIPTION: M5 FEMALE - CABLE MOUNT - SOLDER CUP - 2 POSITION - SHIELDED

NOTE:

MATERIAL

HOUSING:	TPU, BLACK
SHELL:	BRASS
CONTACT:	PHOSPHOR BRONZE
NUT:	BRASS
O-RING:	NBR, BLACK

FINISH

SHELL:	TIN PLATED
CONTACT:	GOLD PLATED
	OVER 50μ NICKEL
	NICKEL PLATED

NUT:

ELECTRICAL

RATED CURRENT:	1A
RATED VOLTAGE:	60V
INSULATION RESISTANCE:	100 mOhms MIN.
CONTACT RESISTANCE:	10 MOhms MAX.
WATER PROOF:	IP67




ENVIRONMENT

OPERATION TEMPERATURE:	-40°C TO +85°C
------------------------	----------------

WIRE GAUGE: 26-28 AWG

850-002-203RSSY

1 = GOLD FLASH
4 = 10μ" GOLD

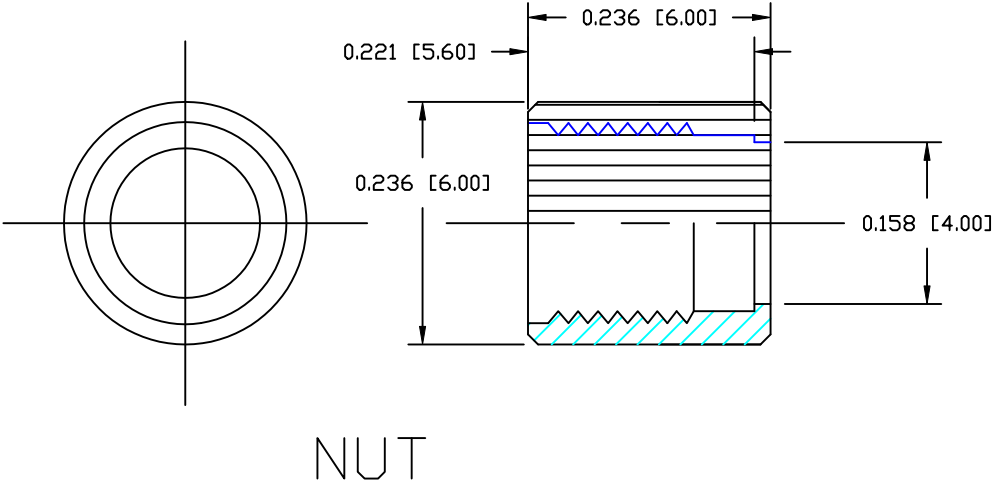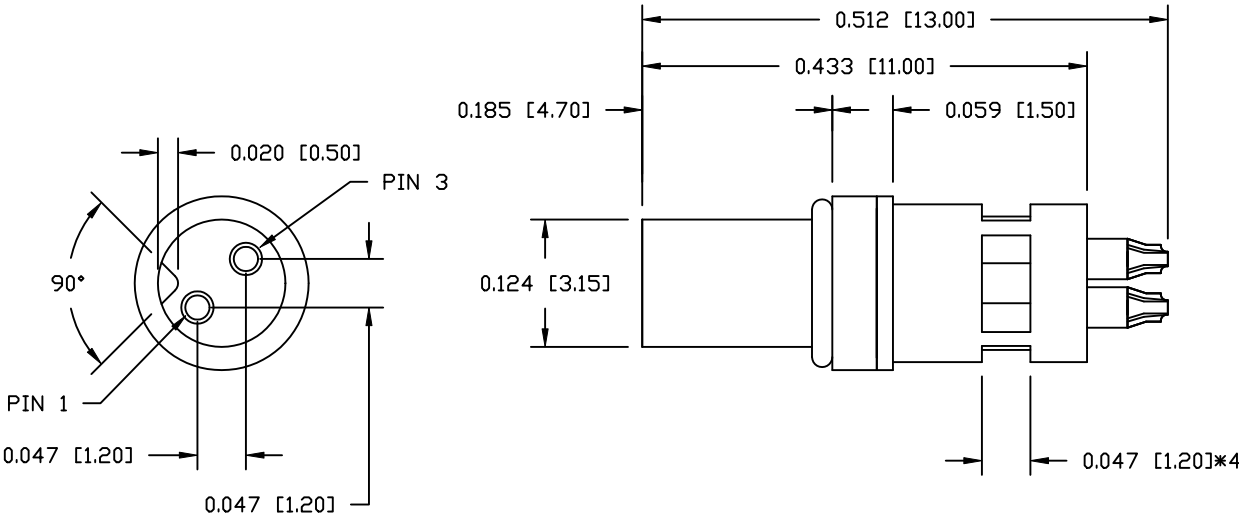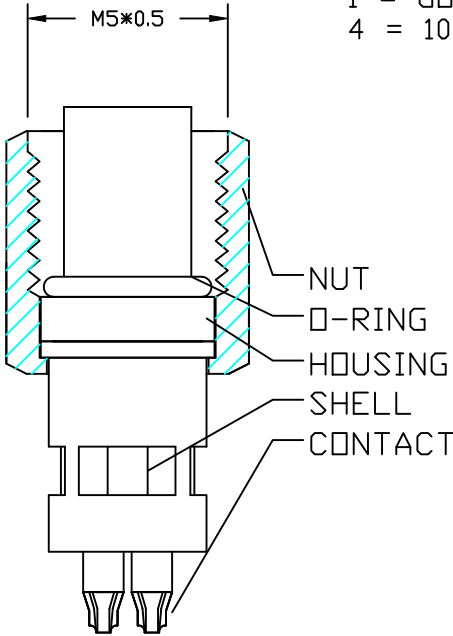

RoHS COMPLIANT

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
M. SIGMON
CHECKED:

DATE:
03-03-16
DATE:

NorComp

SCALE:
NTS
DWG NO.

SHEET
1 OF
1

REV
1

850-002-203RSSY