
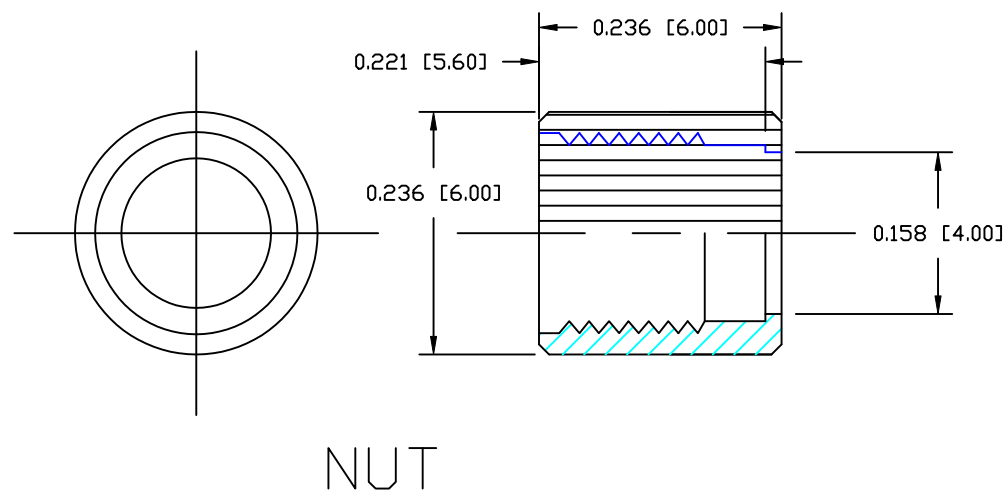
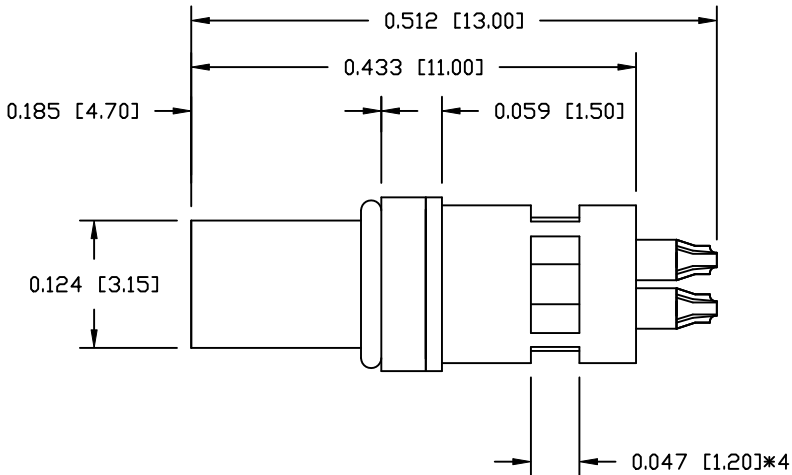


DESCRIPTION: M5 FEMALE - CABLE MOUNT - SOLDER CUP - 4 POSITION - SHIELDED

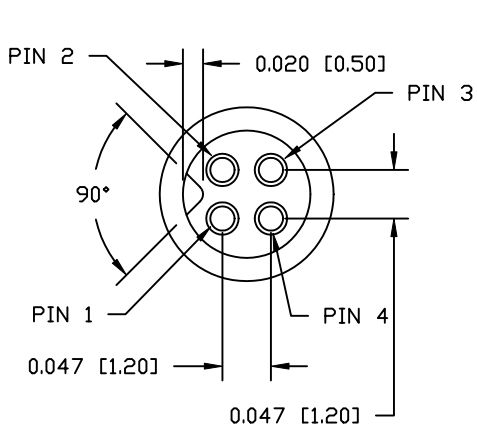

NOTE:

MATERIAL

HOUSING: TPU, BLACK
SHELL: BRASS
CONTACT: PHOSPHOR BRONZE
NUT: BRASS
O-RING: NBR, BLACK

FINISH

SHELL: TIN PLATED
CONTACT: GOLD PLATED
OVER 50μ NICKEL
NICKEL PLATED

NUT:

ELECTRICAL


RATED CURRENT: 1A
RATED VOLTAGE: 60V
INSULATION RESISTANCE: 100 MΩhms MIN.
CONTACT RESISTANCE: 10 MΩhms MAX.
WATER PROOF: IP67

ENVIRONMENT

OPERATION TEMPERATURE: -40°C TO +85°C
WIRE GAUGE: 26-28 AWG

850-004-203RSSY

1 = GOLD FLASH
4 = 10μ" GOLD

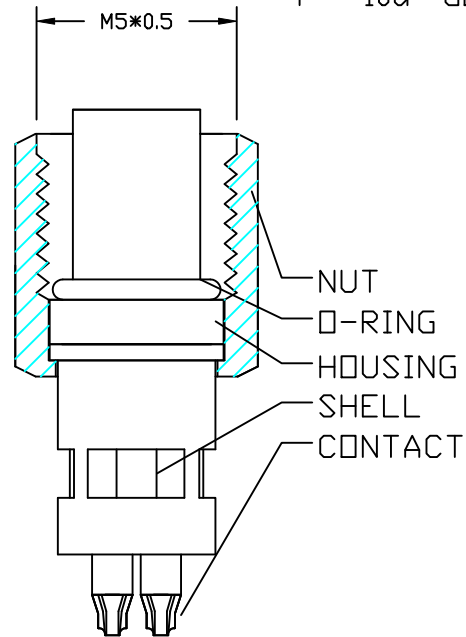

RoHS COMPLIANT

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: M. SIGMON
CHECKED:

DATE: 03-04-16
DATE:

NorComp

SCALE: NTS
DWG NO.

SHEET 1 OF 1

REV 1

850-004-203RSSY