




SPECIFICATIONS:

<b>MATERIALS:</b>	
HOUSING:	PBT, UL94 V-0, BLACK
CONTACTS:	10μ" GOLD PLATED BRASS
MAIN BODY:	PA66, UL94 V-0, BLACK
NUT:	NICKEL PLATED AL ALLOY
SHELL A & B:	NICKEL PLATED BRASS
GLAND CAGE:	PA66, UL94 V-0, WHITE
GLAND NUT:	PA66, UL94 V-0, BLACK
ORING A:	EPDM
ORING B:	NBR

<b>ELECTRICAL:</b>	
RATED CURRENT:	1.5A
RATED VOLTAGE:	30V
INSULATION RESISTANCE:	100 MOhms MIN.
CONTACT RESISTANCE:	10 mOhms MAX.

<b>ENVIRONMENT:</b>	
OPERATING TEMPERATURE:	-40°C TO +85°C
WATER PROOF:	IP67

MAX WIRE AWG:	24 AWG
---------------	--------

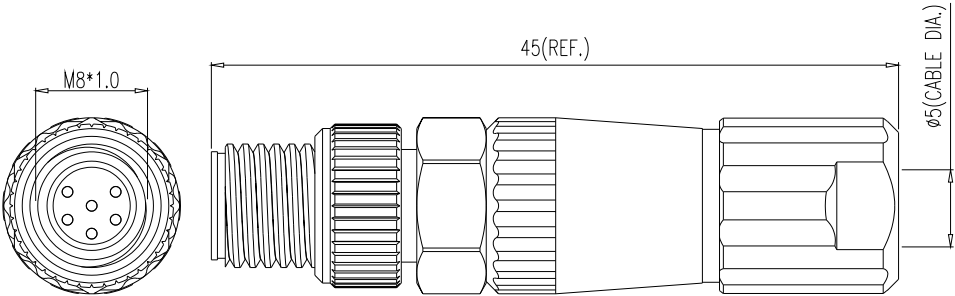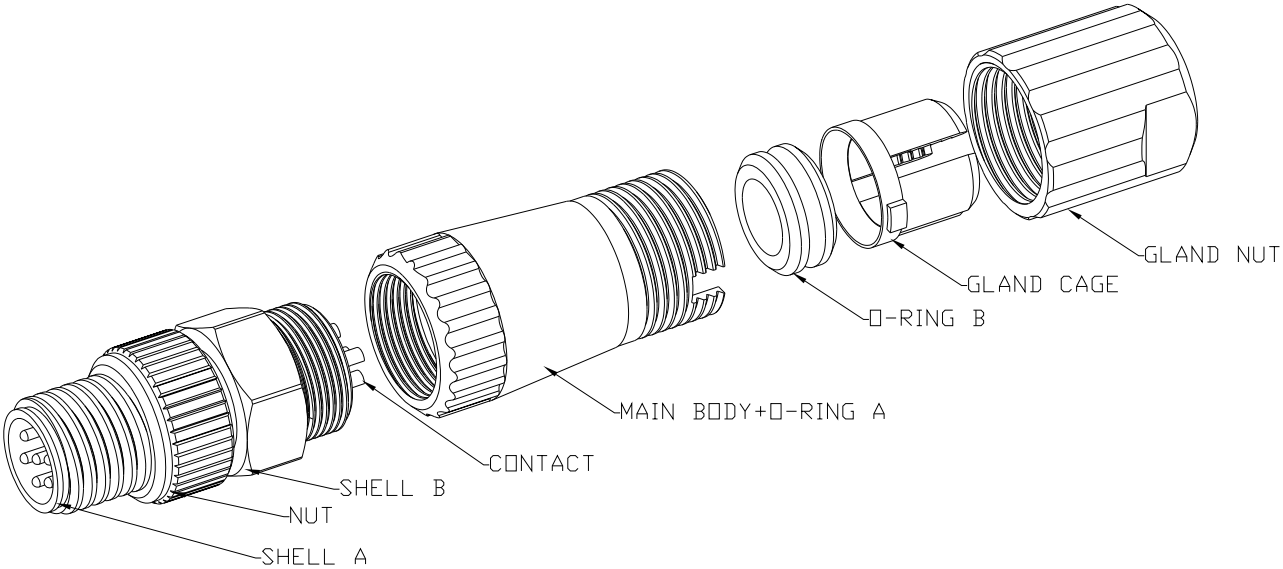

MATING SIDE VIEW

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:  
J. KADEL

DATE:  
09/27/2023

UNITS = mm

DO NOT SCALE FROM DRAWING

NorComp

SCALE:  
NTS

SHEET 1 OF 1

REV 1

DWG NO.

854-006-103RKT4