

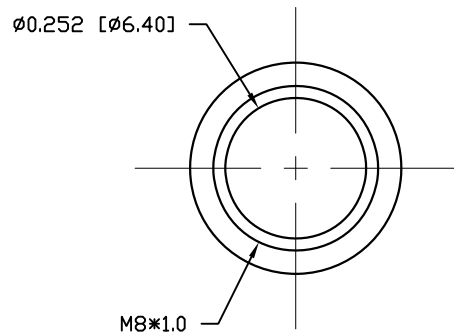
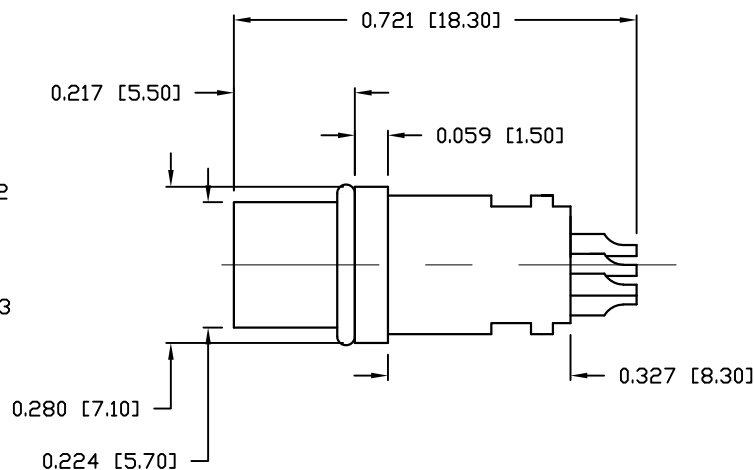


DESCRIPTION: M8 FEMALE - CABLE MOUNT - SOLDER CUP - 6 POS.

UNITS = INCHES [MM]

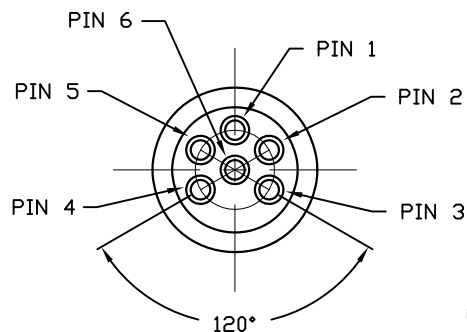

NUT

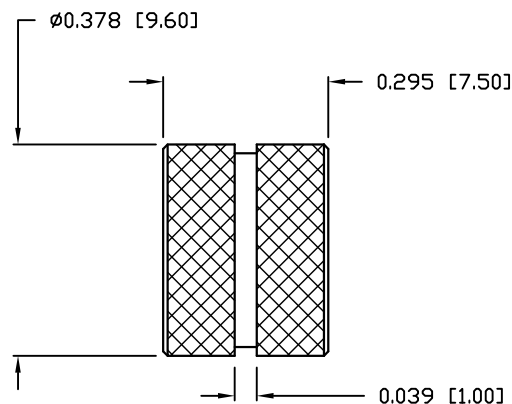

NOTE:

MATERIAL

HOUSING:

CONTACT:

NUT:

GROUND:

O-RING:

FINISH

CONTACT:

NUT:

PBT UL94V-0, BLACK

BRASS

BRASS

BRASS

NBR, BLACK

GOLD PLATED

OVER 50μ" NICKEL

NICKEL PLATED

ELECTRICAL

RATED CURRENT:

RATED VOLTAGE:

INSULATION RESISTANCE:

CONTACT RESISTANCE:

WATER PROOF:

3A

125V

100 mOhms MIN.

10 MOhms MAX.


IP67

ENVIRONMENT

OPERATION TEMPERATURE: -40°C TO +85°C

MAX MATING TORQUE: 4-5 in lbs

854-006-203RLUY

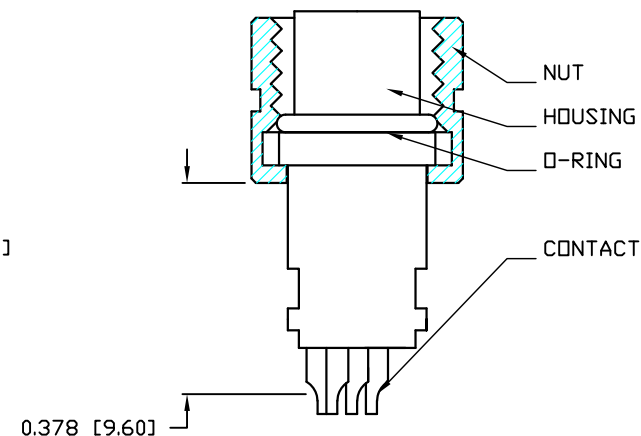1 = GOLD FLASH
4 = 10μ" GOLD

RoHS COMPLIANT

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

M. SIGMON

DATE:

09-23-16

CHECKED:

DATE:

NorComp

SCALE:

N.T.S.

SHEET

1

OF

1

REV

2

DWG NO.

854-006-203RLUY