

DESCRIPTION: M8 // M // SHIELDED CABLE MOUNT

NOTE:

MATERIAL

HOUSING:

PA66 UL94V-0, BLACK

CONTACT:

10u" GOLD PLATED BRASS

NUT:

NICKEL PLATED BRASS

SHELL:

NICKEL PLATED BRASS

ELECTRICAL

RATED CURRENT:

1.5A

RATED VOLTAGE:

30V

INSULATION RESISTANCE:

100 MΩhms MIN.

CONTACT RESISTANCE:

10 mΩhms MAX.


WATER PROOF:

IP67

ENVIRONMENT

OPERATION TEMPERATURE:

-40°C TO +105°C

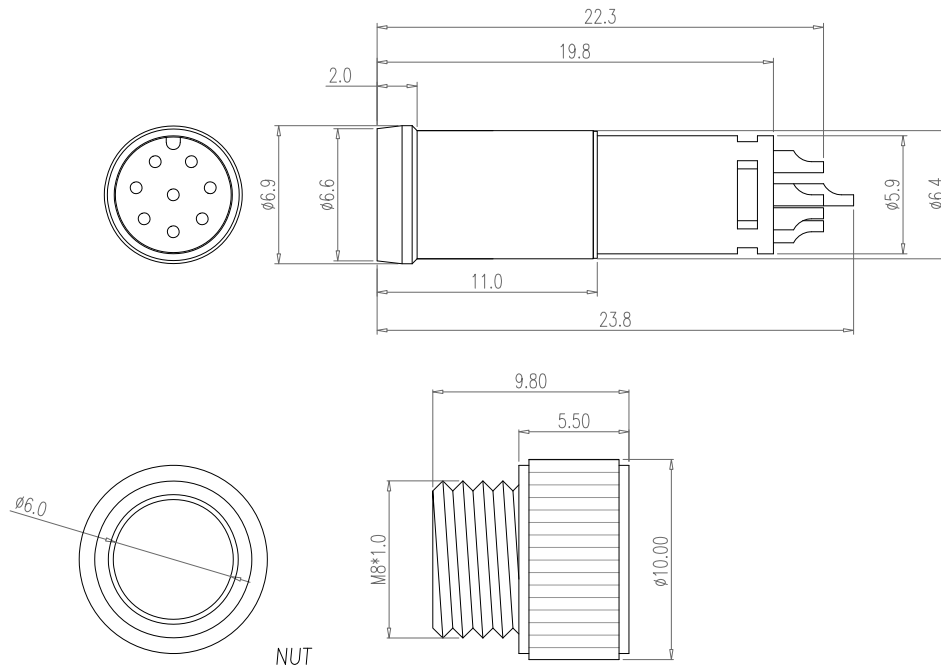

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

J. KADEL

DATE:

01/26/2022

UNITS = mm

DO NOT SCALE FROM DRAWING

NorComp

SCALE:
NTS

SHEET OF
1 1

REV
0

DWG NO.

854-008-103RLS4