
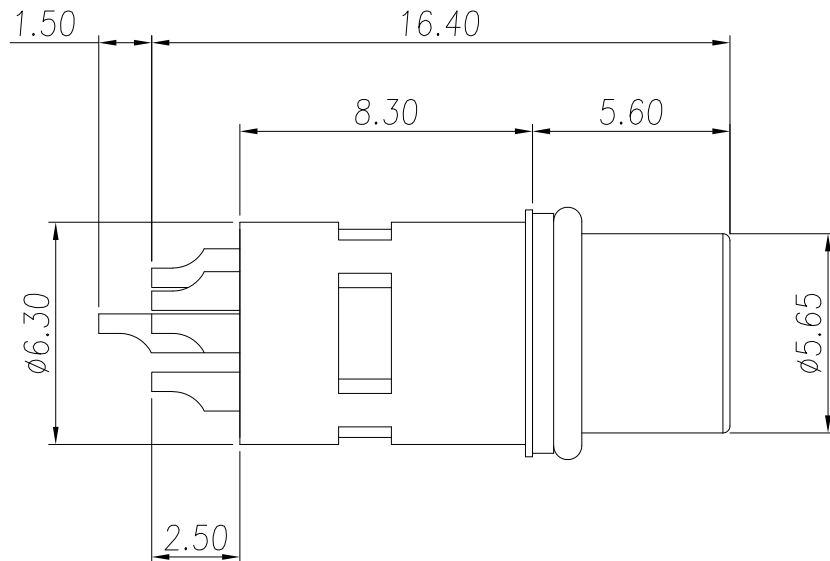


DESCRIPTION: M8 // 8P // F // CBL MNT // SHIELDED

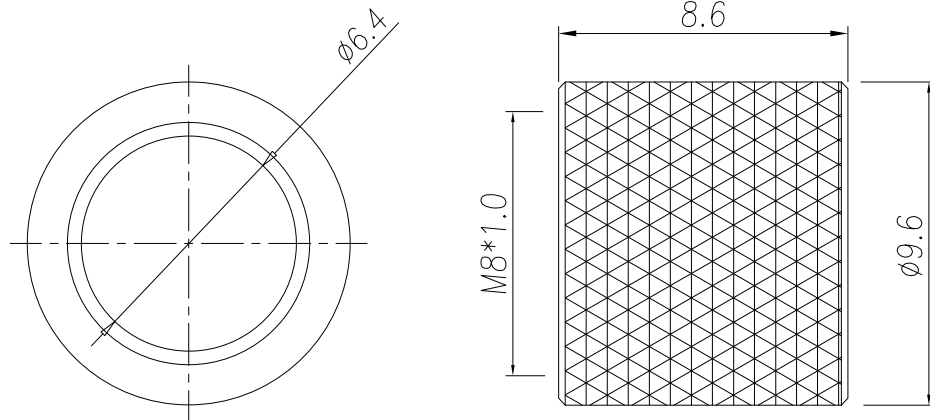

## NOTE:

### MATERIAL

HOUSING

PA66 UL94V-0, BLACK

CONTACT

BRASS, 10u" GOLD

NUT

BRASS, NICKEL

SHELL

BRASS, NICKEL

O-RING

NBR

### ELECTRICAL

RATED CURRENT

1.5A

VOLTAGE

30V

INSULATION RESISTANCE

100 MOhms MIN.

CONTACT RESISTANCE

10 mOhms MAX.

WATER PROOF

IP67


### ENVIRONMENT

OPERATION TEMPERATURE

-40°C TO +85°C

MAX WIRE AWG

24 AWG



RoHS COMPLIANT

UNITS = mm

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

J. KADEL

DATE:

04/07/2021

NorComp

SCALE:

NTS

SHEET

OF

1

1

REV

2

DWG NO.

854-008-203RLS4