


DESCRIPTION: 5P & 6P UNSHIELDED CABLE MOUNT V SHAPE KEY UNSHIELDED

SPECIFICATIONS:


**MATERIALS:**  
HOUSING: PA66, UL94 V-0, BLACK  
CONTACTS: GOLD FLASH PLATED BRASS  
NUT: NICKEL PLATED BRASS

**ELECTRICAL:**  
RATED CURRENT: 2A  
RATED VOLTAGE: 30V  
INSULATION RESISTANCE: 100 MOhms MIN.  
CONTACT RESISTANCE: 10 mOhms MAX.

**ENVIRONMENT:**  
OPERATING TEMPERATURE: -40°C TO +105°C  
WATER PROOF: IP67

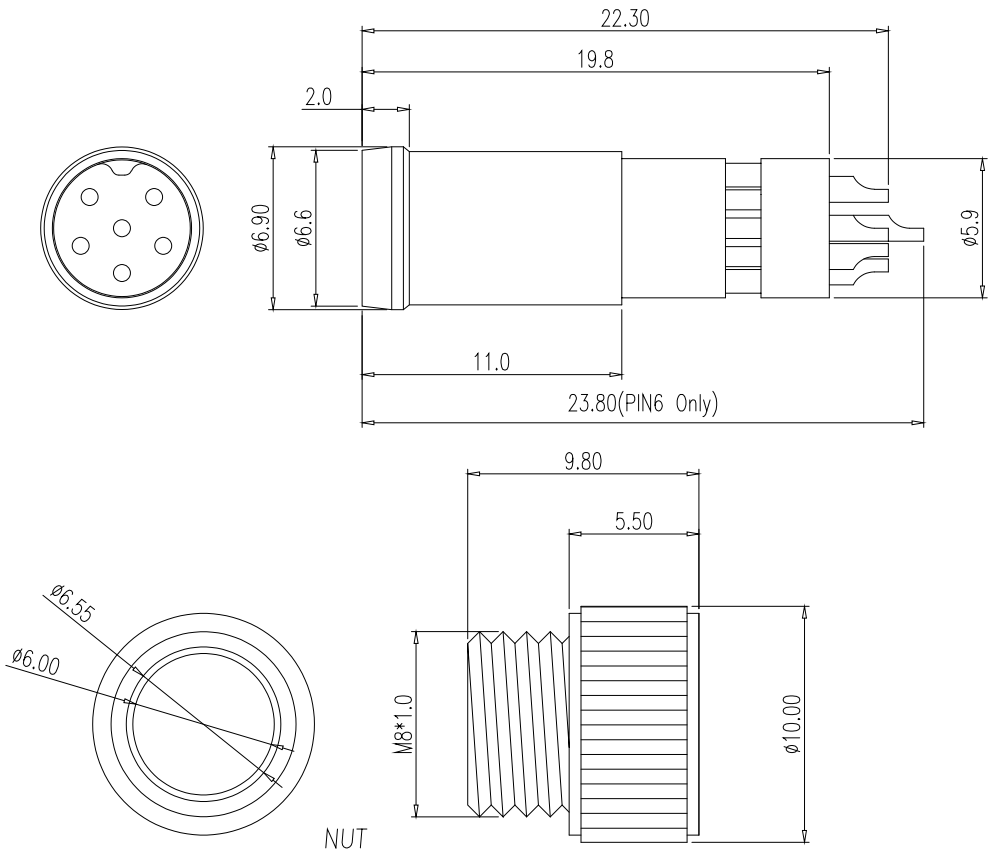

854-V0Y-103RLU1  
005 = 5 POSITION  
006 = 6 POSITION

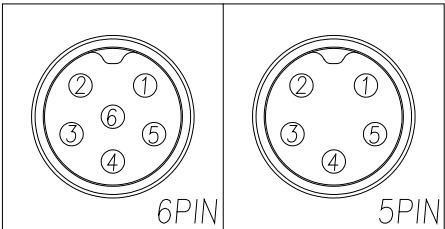

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: J. KADEL  
DATE: 10/28/2025

UNITS = mm DO NOT SCALE FROM DRAWING

NorComp

SCALE: NTS

SHEET 1 OF 1

REV 1

DWG NO. 854-V0Y-103RLU1