

DESCRIPTION: 5P & 6P UNSHIELDED CABLE MOUNT V SHAPE KEY UNSHIELDED

SPECIFICATIONS:

MATERIALS:


HOUSING:	PA66, UL94 V-0, BLACK
CONTACTS:	GOLD FLASH PLATED BRASS
NUT:	NICKEL PLATED BRASS
ORING:	NBR

ELECTRICAL:

RATED CURRENT:	2A
RATED VOLTAGE:	30V
INSULATION RESISTANCE:	100 MOhms MIN.
CONTACT RESISTANCE:	10 mOhms MAX.


ENVIRONMENT:

OPERATING TEMPERATURE:	-40°C TO +105°C
WATER PROOF:	IP67

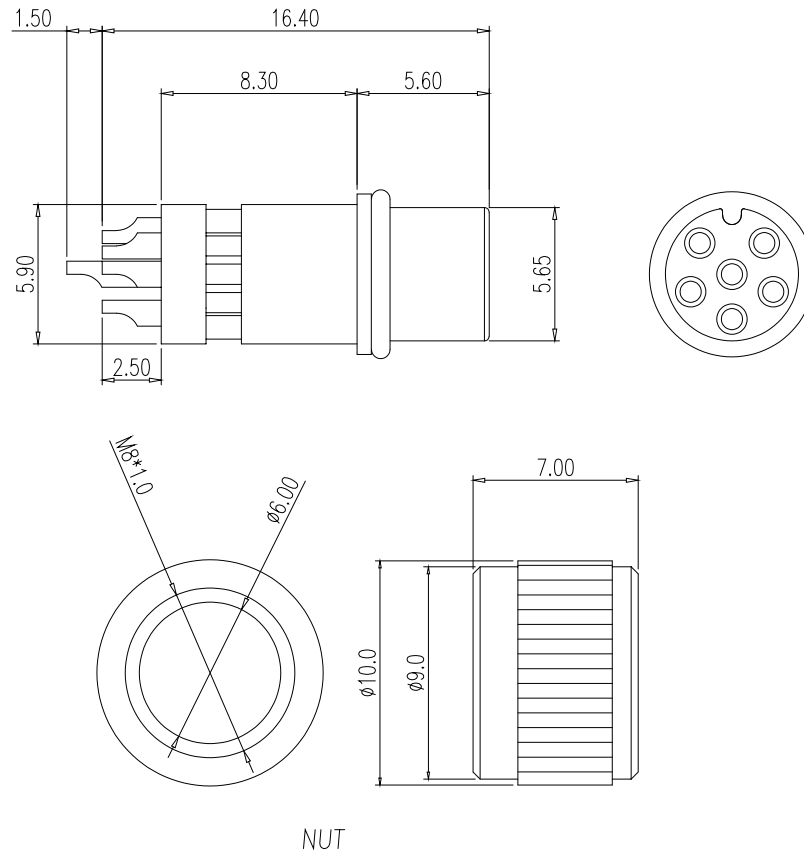

854-V0Y-203RSU1

005 = 5 POSITION
006 = 6 POSITION

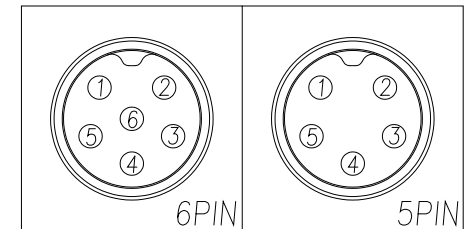

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

J. KADEL

DATE:

10/28/2025

UNITS = mm

DO NOT SCALE FROM DRAWING

NorComp

SCALE:
NTS

SHEET OF
1 1

REV
1

DWG NO.

854-V0Y-203RSU1