
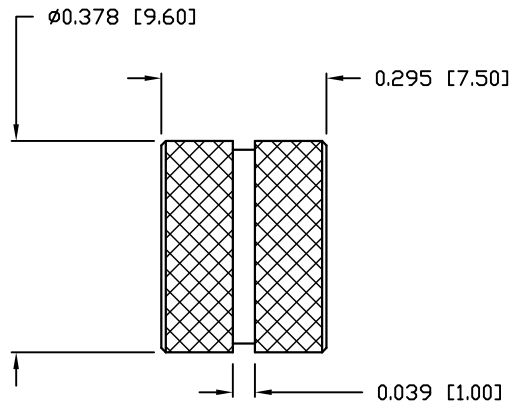


DESCRIPTION: M8 FEMALE - CABLE MOUNT - SOLDER CUP - 3 POS.

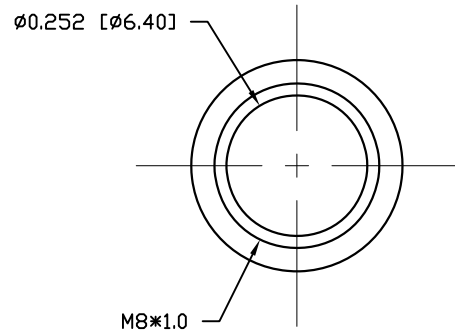

NUT

## NOTE:

### MATERIAL

HOUSING:  
CONTACT:  
GROUND:  
SHELL:  
O-RING:

PBT UL94V-0, BLACK  
PHOSPHOR BRONZE  
BRASS  
BRASS  
NBR, BLACK

### FINISH

CONTACT:  
UNDER PLATE:  
GROUND:  
SHELL:

GOLD PLATED, 10 $\mu$ m Min.  
NICKEL  
NICKEL 60 $\mu$ m BRIGHT TIN  
NICKEL

### ELECTRICAL

RATED CURRENT:  
RATED VOLTAGE:  
INSULATION RESISTANCE:  
CONTACT RESISTANCE:  
WATER PROOF:



5A  
125V  
1000 MOhms MIN.  
10 mOhms MAX.  
IP67

### ENVIRONMENT

OPERATION TEMPERATURE:  
WIRE GAUGE:

-40°C TO +85°C  
24-28 AWG

MAX MATING TORQUE: 4-5 in lbs

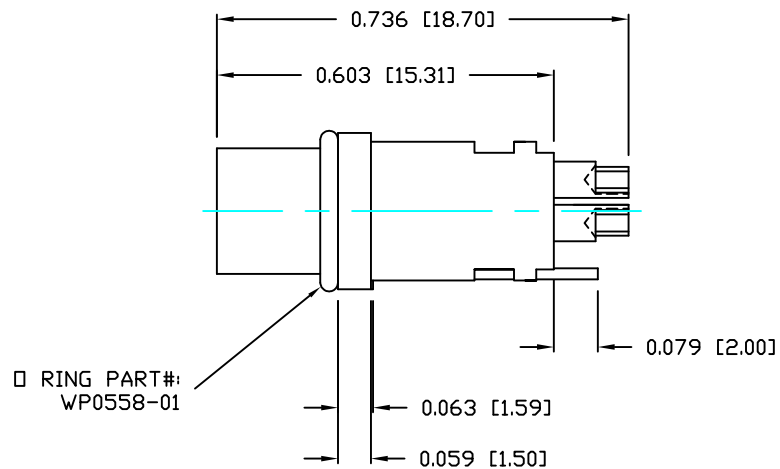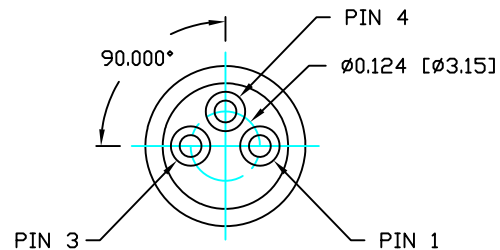

RoHS COMPLIANT

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

B. BRIDGES

DATE:

02-27-18

CHECKED:

DATE:

NorComp

SCALE:

N.T.S.

SHEET

OF

1

1

REV

1

DWG NO.

854A003-203RLSY