



DESCRIPTION: M8 FEMALE - CABLE MOUNT - SOLDER CUP - 4 POS.

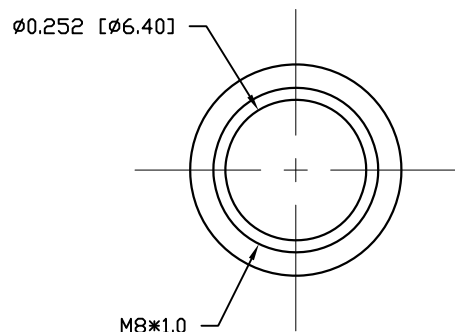

NUT

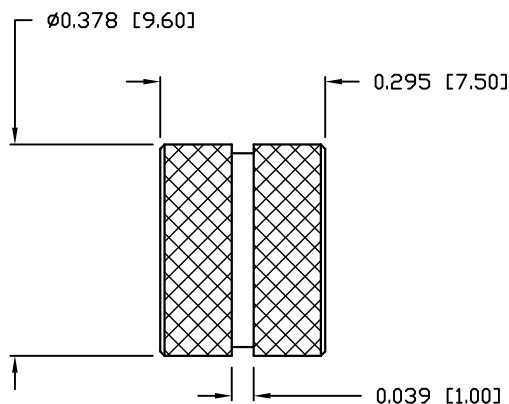

NOTE:

MATERIAL

HOUSING:

PBT UL94V-0, BLACK

CONTACT:

PHOSPHOR BRONZE

SHELL:

BRASS

NUT:

BRASS

O-RING:

NBR, BLACK

FINISH:

CONTACT:

GOLD PLATED  
OVER 50μ" NICKEL  
BRIGHT TIN 60μ"  
NICKEL PLATED

GROUND:

SHELL:

ELECTRICAL

RATED CURRENT:

5A

RATED VOLTAGE:

125V

INSULATION RESISTANCE:

1000 MΩhms MIN.

CONTACT RESISTANCE:

10 mΩhms MAX.

WATER PROOF:

IP67

ENVIRONMENT

OPERATION TEMPERATURE: -40°C TO +85°C




WIRE GAUGE:

24-28 AWG

MAX MATING TORQUE: 4-5 in lbs

854A004-203RLSY

1 = GOLD FLASH  
4 = 10μ" GOLD

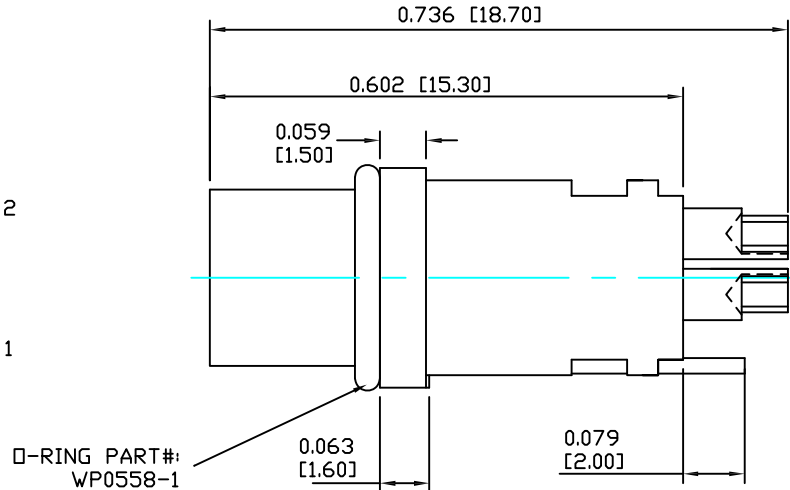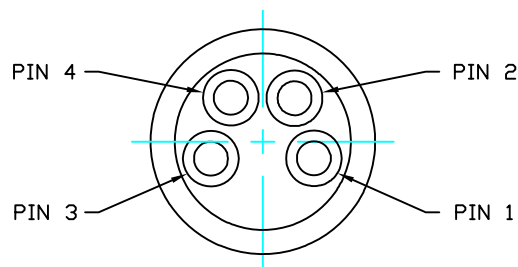

RoHS COMPLIANT

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

M. SIGMON

DATE:

04-05-17

CHECKED:

DATE:

NorComp

SCALE:

N.T.S.

SHEET

1

OF

1

REV

1

DWG NO.

854A004-203RLSY