



DESCRIPTION: M8 FEMALE - CABLE MOUNT - SOLDER CUP - 6 POS.

UNITS = INCHES [MM]

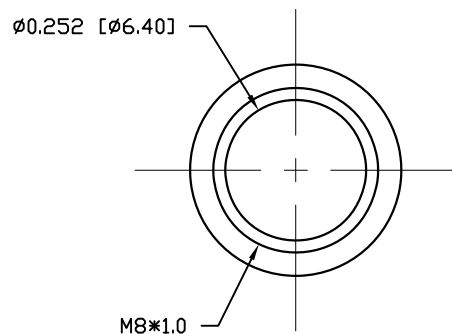

NUT

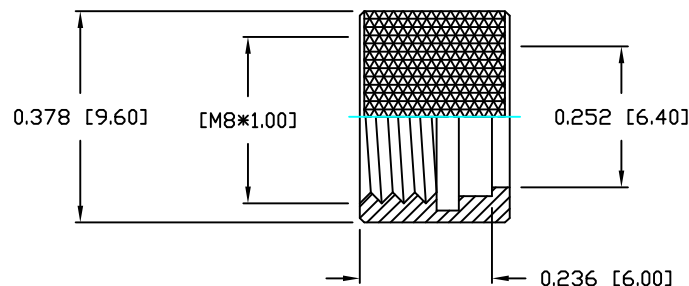

NOTE:

MATERIAL

HOUSING: PBT UL94V-0, BLACK
 CONTACT: BRASS
 NUT: BRASS
 GROUND: BRASS
 O-RING: NBR, BLACK
 FINISH
 CONTACT: GOLD PLATED
 OVER 50 μ " NICKEL
 NUT: NICKEL PLATED
 GROUND: BRIGHT TIN (60 μ ")

ELECTRICAL




RATED CURRENT: 3A
 RATED VOLTAGE: 125V
 INSULATION RESISTANCE: 1000 MOhms MIN.
 CONTACT RESISTANCE: 10 mOhms MAX.
 WATER PROOF: IP67

ENVIRONMENT

OPERATION TEMPERATURE: -40°C TO +85°C
 MAX MATING TORQUE: 4-5 in lbs

854-006-203RLSY

1 = GOLD FLASH
 4 = 10 μ " GOLD

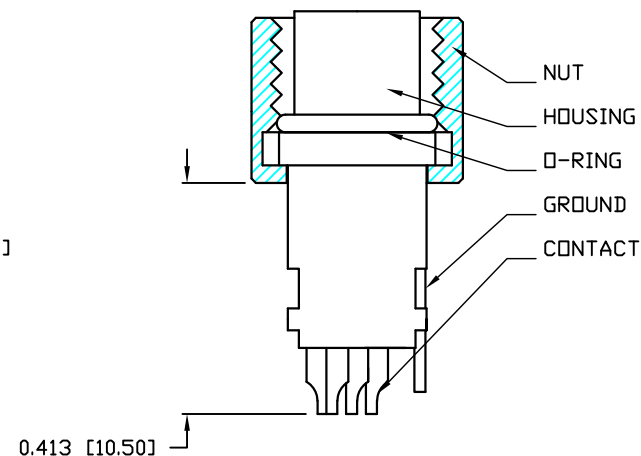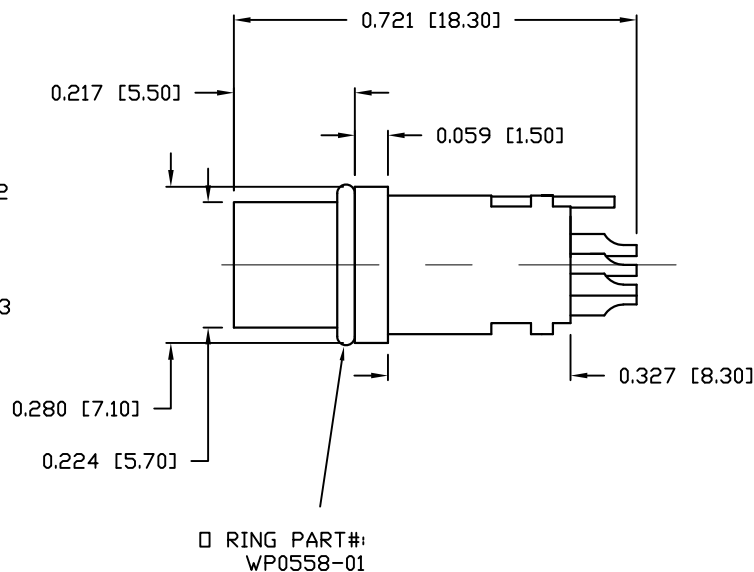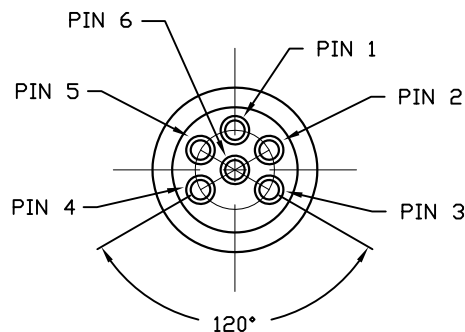

RoHS COMPLIANT

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

B. BRIDGES

DATE:

03-06-2018

CHECKED:

DATE:

NorComp

SCALE:

N.T.S.

SHEET

1

OF

1

REV

3

DWG NO.

854A006-203RLSY