


DESCRIPTION: HIGH DENSITY - MACHINED CONTACTS - RIGHT ANGLE - MALE

"14" BRACKET OPTION SHOWN BELOW

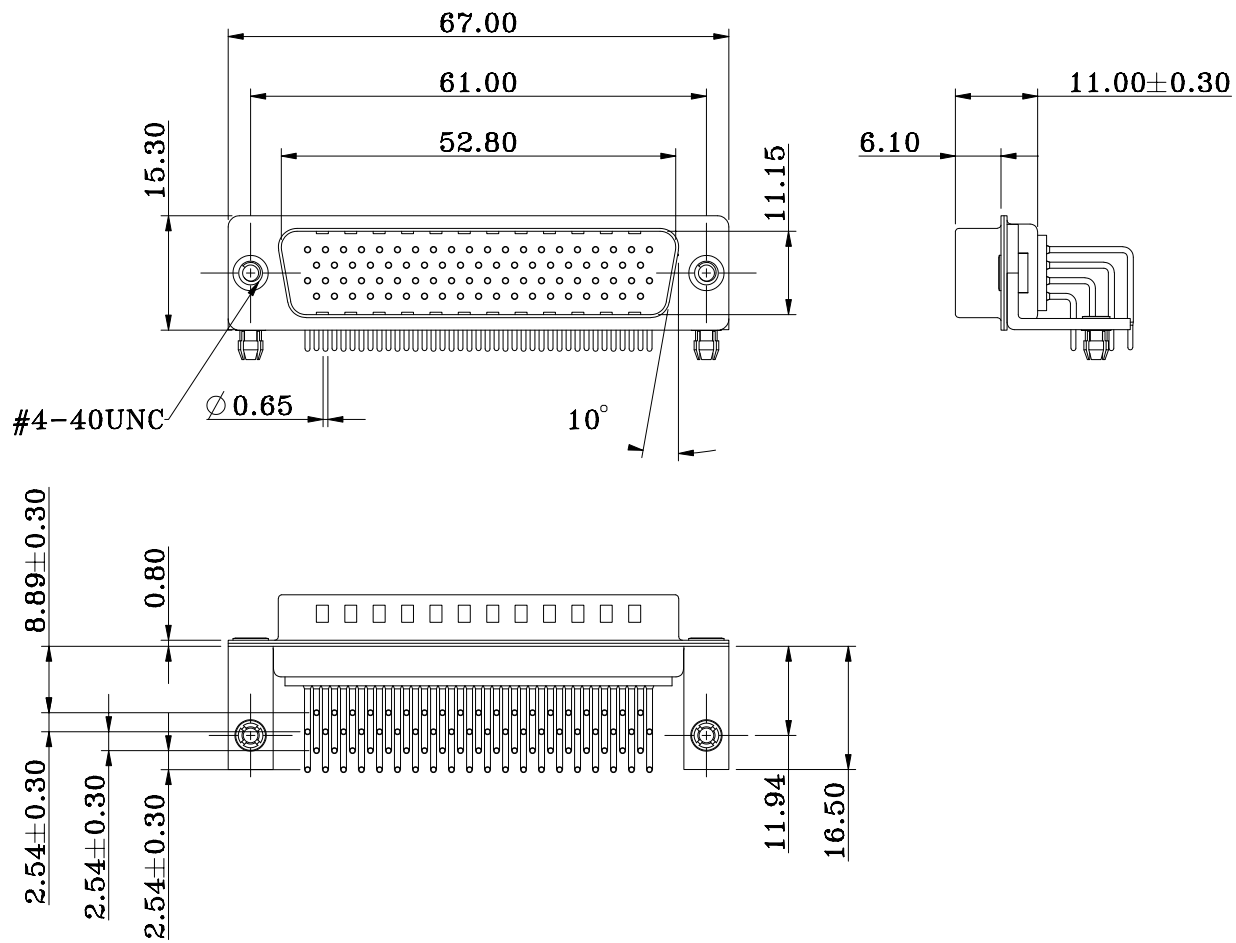

SPECIFICATIONS:

ELECTRICAL:
 INSULATION RESISTANCE: 5 GΩ MIN.
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC FOR 1 MIN
 OPERATING TEMPERATURE: -55°C TO +125°C
 CONTACT RESISTANCE: 10 mΩ MAX.
 CONTACT AMPERAGE: 3 AMPS

MATERIALS:
 CONTACTS: BRASS, SEE P/N KEY FOR PLATING
 INSULATOR: PA6T, UL94 V-0 RATED, BLACK
 260°C PROCESS TEMP.
 SHELL: NICKEL PLATED STEEL
 HARDWARE: ZINC PLATED STEEL

181-M78-113RYYY

SERIES _____
 MACHINED CONTACTS _____
 POSITIONS _____
 78 _____
 GENDER _____
 1 = MALE _____
 TERMINATION _____
 1 = RIGHT ANGLE _____
 SHELL PLATING _____
 3 = NICKEL _____
 HARDWARE OPTIONS _____
 00 = NO HARDWARE, Ø.120" HOLE _____
 14 = BRACKET WITH #4-40 INSERT, BOARD LOCK _____
 PLATING OPTIONS _____
 1 = GOLD FLASH, ENTIRE CONTACT _____
 2 = 30u" GOLD, ENTIRE CONTACT _____

RoHS COMPLIANT

UNITS = mm

DO NOT SCALE FROM DRAWING




THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: J. KADEL
 DATE: 12/19/2022

NorComp

SCALE: NTS	SHEET 1 OF 2	REV 2
DWG NO. 181-M78-113RYYY		

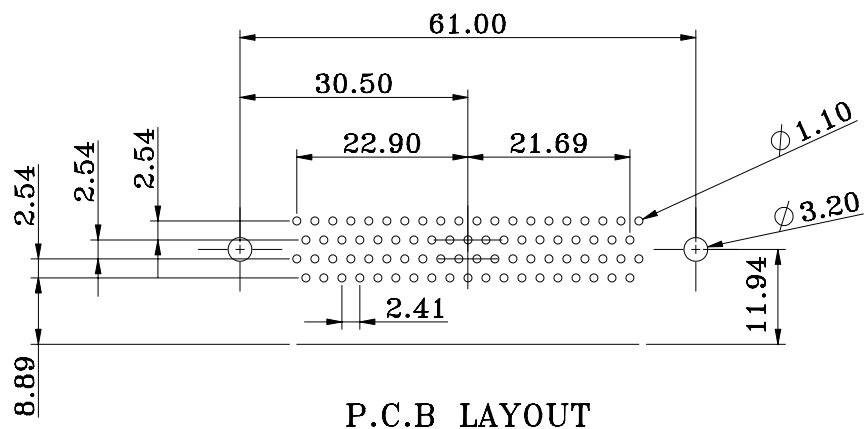

RoHS COMPLIANT

UNITS = mm

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

J. KADEL

DATE:

12/19/2022

NorComp

SCALE:

NTS

SHEET

OF

2

2

REV

2

DWG NO.

181-M78-113RYYY