
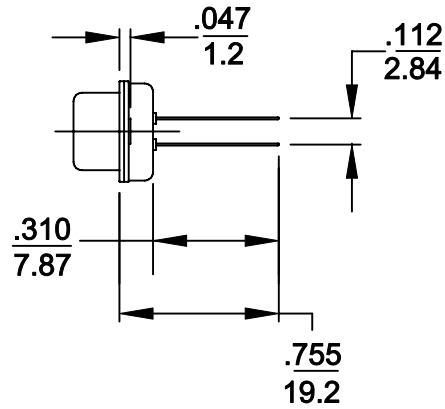


DESCRIPTION: WIRE WRAP FILTERED D-SUB

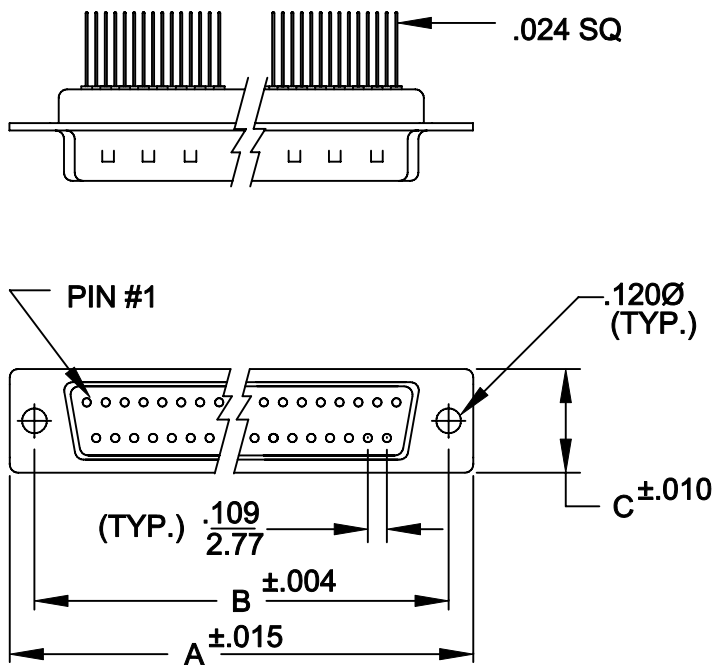

	A	B	C
9	1.204 30.60	.984 25.00	.480 12.20
15	1.535 39.00	1.312 33.30	.480 12.20
25	2.078 52.80	1.850 47.00	.480 12.20
37	2.724 69.20	2.500 63.50	.480 12.20
50	2.622 66.60	2.405 61.10	.598 15.20

477-YYY-142RYY1

SERIES _____
POSITIONS _____
009 _____
015 _____
025 _____
037 _____
050 _____
GENDER _____
1 = MALE
2 = FEMALE
TERMINATION _____
4 = WIRE WRAP
SHELL PLATING _____
2 = TIN
HARDWARE OPTIONS _____
00 = NO HARDWARE
PLATING OPTIONS _____
1 = GOLD FLASH

SPECIFICATIONS:
MATERIALS:
SHELL: STEEL, TIN PLATED
INSULATOR: UL 94V-0 RATED PBTP
GLASS-FIBER REINFORCED
ELECTRICALS:
INDIVIDUAL CAPACITOR VALUE = 1000 pF
OTHER VALUES AVAILABLE: CONSULT FACTORY
CURRENT RATING: 5 AMPS
CONTACT RESISTANCE: <10 mOHMS
INSULATOR RESISTANCE: 1010 OHMS
VOLTAGE: 1 KV / AC
TEMPERATURE: -55°C TO +125°C

RoHS COMPLIANT

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: WAYNE ROBBINS		DATE: 9-03-98	
			CHECKED:		DATE:	
	NorComp		SCALE: 1:1	SHEET 1 OF 1	REV 0	
DWG NO. 477-YYY-142R001						