



CONTACT Ø AT TERMINATION SIDE SIGNAL CONTACTS =  $\emptyset$ 0.65  $20 \text{ AMP} = \emptyset 2.80$  $40 \text{ AMP} = \emptyset 3.75$ 

### HARDWARE OPTIONS

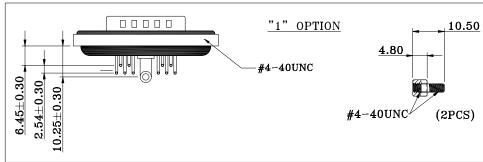

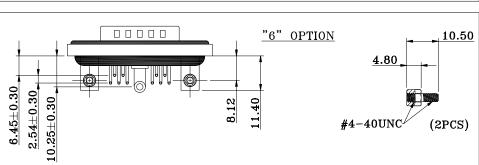

# NOTE:

MATERIAL HOUSING

> FLANGE CONTACT

SHELL O-RING

SEALING COMPOUND

HARDWARE

PBT UL94V-0. BLACK BRASS, PLATING P/N KEY BELOW

PBT UL94V-0, BLACK

STEEL, NICKEL SILICONE

**EPOXY** 

BRASS; NICKEL PLATED

#### ELECTRICAL

SIGNAL CONTACT RATED CURRENT POWER CONTACT RATED CURRENT

VOLTAGE INSULATOR RESISTANCE

SIGNAL CONTACT RESISTANCE

POWER CONTACT RESISTANCE WATER PROOF

ENVIRONMENT

OPERATION TEMPERATURE


5A

P/N KEY BELOW 1000 VAC 1 MIN

5 GOhms MIN. 10 m0hms MAX. 2.0 m0hms MAX.

**IP67** 

-25°C TO +85°C

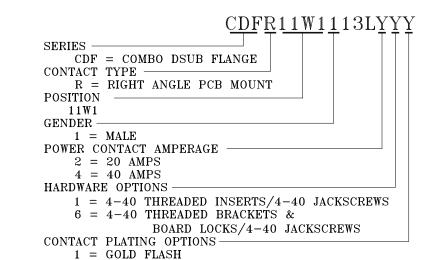

2 = 30u GOLD PLATING

# ROHS COMPLIANT



DRAWN: J. KADEL DATE:

06/08/2020

TOLERANCES  $\pm 0.40$  $\pm 0.30$ X. .XX  $\pm 0.20$ .XXX  $\pm 0.10$  UNITS = mm

DO NOT SCALE FROM DRAWING




SCALE: SHEET NTS 1 DWG NO.

CDFR11W1113LYYY


**REV** 

## \*\*ø3.20MM HOLES NOT NEEDED FOR "1" HARDWARE OPTION

### 20 AMP CONFIGURATION

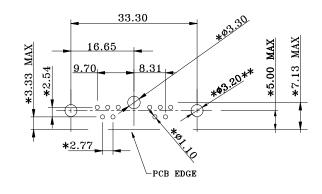

### 40 AMP CONFIGURATION



RECOMMENDED PCB LAYOUT \*TYPICAL // HOLE SIZE MAY NOT BE SUITABLE FOR YOUR SPECIFIC APPLICATION

ROHS COMPLIA



DRAWN: J. KADEL DATE: 06/08/2020 TOLERANCES  $\begin{array}{ccc} \text{X.} & \pm 0.40 \\ \text{.X.} & \pm 0.30 \\ \text{.XX.} & \pm 0.20 \end{array}$ .XXX  $\pm 0.10$ 

DO NOT SCALE FROM DRAWING UNITS = mmSCALE: SHEET NorComp 2 NTS DWG NO. CDFR11W1113LYYY

REV