
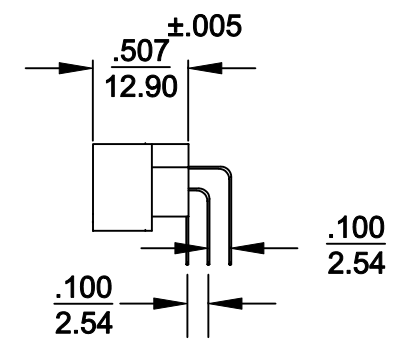
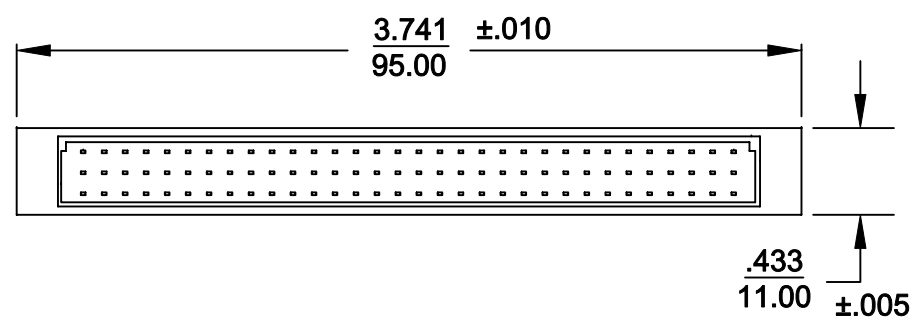
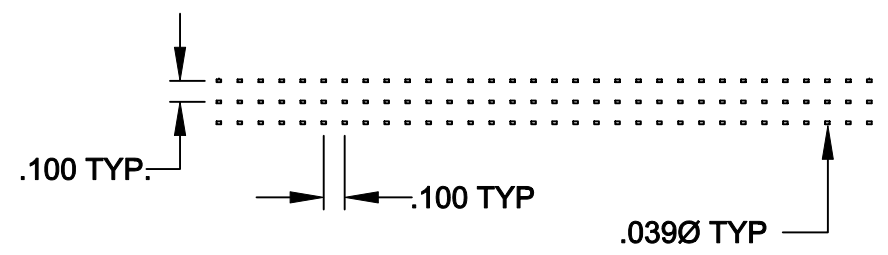


DESCRIPTION: DIN MALE RIGHT ANGLE DIP SOLDER


688-XXX-110R001

096 = Rows A, B and C Loaded  
064 = Rows A and C Loaded

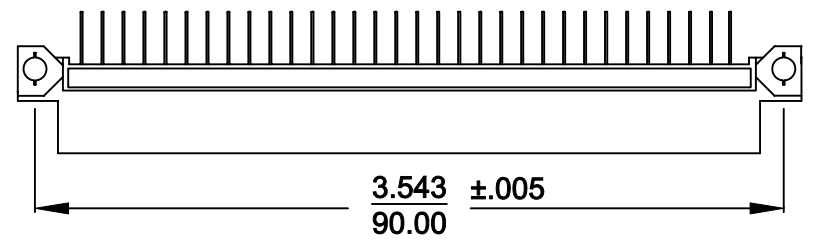

Material:  
Insulator: Glass-Filled PBT U.L. rated 94V-0 - 230°C PROCESS TEMP.  
Contacts: Brass  
RoHS COMPLIANT

Electricals:  
Current Rating: 2 Amps  
Dielectric Withstanding Voltage: AC 1000V for 1 minute  
Insulator Resistance: 1000M OHMS min. at 500VDC  
Contact Resistance: 30 m Ohms max. at 100mA DC  
Operating Temperature: - 55°C to +105°C

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: WAYNE ROBBINS	DATE: 10-19-98
	NorComp			CHECKED:
SCALE: 1:1				SHEET 1 OF 1
DWG NO. 688-XXX-110R001				