


DESCRIPTION: 25 POS MICRO-D FEMALE (ASSEMBLED) TO BLUNT CUT

THUMBSCREWS: NICKEL PLATED STEEL - UNC #2-56 THREAD

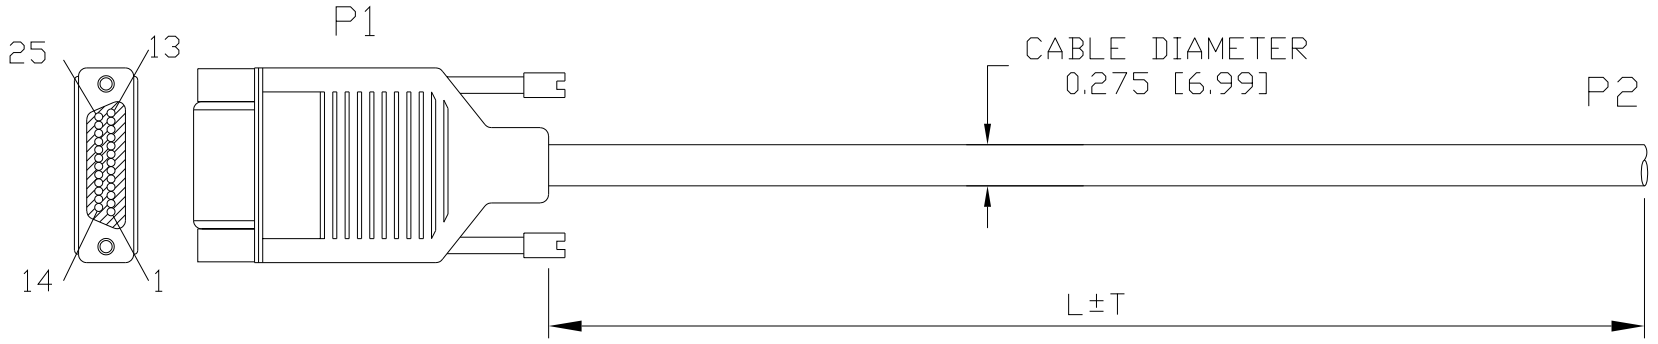

- 1. P1: NORCOMP p/n 960-025-010R011
- 2. P2: BLUNT CUT END
- 3. WIRE: 28AWG [7X36] x25C +ALUMINUM FOIL + BRAID 65%, UL2464, COLOR BLACK
- 4. PINOUT:

| P1 | | P2 |
|-------|-------|--------------|
| 1 | _____ | BLACK |
| 2 | _____ | BROWN |
| 3 | _____ | RED |
| 4 | _____ | ORANGE |
| 5 | _____ | YELLOW |
| 6 | _____ | GREEN |
| 7 | _____ | BLUE |
| 8 | _____ | VIOLET |
| 9 | _____ | GRAY |
| 10 | _____ | WHITE |
| 11 | _____ | PINK |
| 12 | _____ | LIGHT GREEN |
| 13 | _____ | BLACK WHITE |
| 14 | _____ | BROWN WHITE |
| 15 | _____ | RED WHITE |
| 16 | _____ | ORANGE WHITE |
| 17 | _____ | GREEN WHITE |
| 18 | _____ | BLUE WHITE |
| 19 | _____ | VIOLET WHITE |
| 20 | _____ | RED BLACK |
| 21 | _____ | ORANGE BLACK |
| 22 | _____ | YELLOW BLACK |
| 23 | _____ | GREEN BLACK |
| 24 | _____ | GRAY BLACK |
| 25 | _____ | PINK BLACK |
| SHELL | _____ | SHIELD |

| P/N | L ± T |
|-----------------|-------------|
| CCA-025-I18R152 | 18±0.590in |
| CCA-025-I36R152 | 36±0.787in |
| CCA-025-I72R152 | 72±0.984in |
| CCA-025-M.5R152 | 500±15mm |
| CCA-025-M01R152 | 1000±20mm |
| CCA-025-M02R152 | 2000±25mm |
| CCA-025-M10R152 | 10000±100mm |
| CCA-025-F08R152 | 8±0.17ft |
| CCA-025-F10R152 | 10±0.17ft |
| CCA-025-F60R152 | 60±0.5ft |

NOTE:
 NOT DESIGNED TO MATE WITH NORCOMP 580-M // 581-M SERIES CONNECTORS.
 IF ANY QUESTIONS PLEASE CONTACT ENG@NORCOMP.NET

PACKAGED: 1 PER BAG

RoHS COMPLIANT

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
P. JENKINS
 DATE:
 01/18/2012

NorComp

SCALE: NTS
 SHEET 1 OF 1
 REV 8
 DWG NO. CCA-025-YYYYR152