
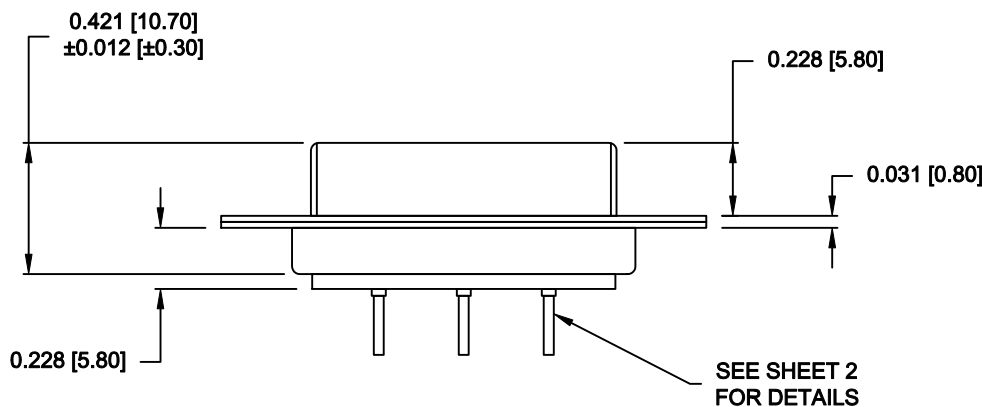


DESCRIPTION: COAXIAL - VERTICAL BOARD - FEMALE - MACHINED

UNITS = INCHES [MM]

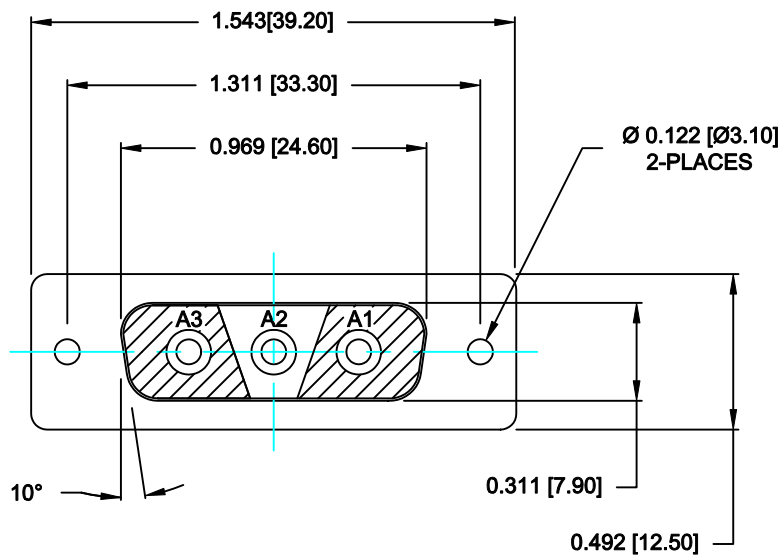

SPECIFICATIONS:

ELECTRICAL:
INSULATOR RESISTANCE: 5 GOHMS Min.
OPERATING TEMPERATURE: -55° C ~ +125° C
CONTACT RESISTANCE: 2.7 Milliohms Max.
COAXIAL CONTACT IMPEDANCE: 50 OHM

MECHANICAL:
CONTACT INSERTION FORCE: 4.5 Kg Max.
CONTACT SEPARATOR FORCE: 0.3Kg Min.



MATERIALS:
CONTACTS: COPPER ALLOY
INSULATOR: PBT UL94V-0 RATED,
BLACK
230°C PROCESS TEMP.
SHELL: STEEL

FINISH:
SHELL: NICKEL
CONTACTS: FULL GOLD FLASH

683M3W3K203L001

00 = 50 OHM COAXIAL


RoHS COMPLIANT

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: M. SIGMON		DATE: 03-12-15	
		CHECKED: X		DATE: X	
	SCALE: N.T.S.		SHEET 1		OF 2
	DWG NO.		683M3W3K203L001		
		REV 1			

RECOMMENDED PCB LAYOUT

50 OHM COAXIAL CONTACT

RoHS COMPLIANT

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: M. SIGMON		DATE: 03-12-15			
		CHECKED: X		DATE: X			
<h1>NorComp</h1>			SCALE: N.T.S.		SHEET 2	OF 2	REV 1
			DWG NO. 683M3W3K203L001				