



SPECIFICATIONS:

ELECTRICAL:
INSULATOR RESISTANCE: 5 GOHMS Min.
DIELECTRIC WITHSTANDING: 1,000VAC r.m.s.
OPERATING TEMPERATURE: -55° C ~ +125° C
SIGNAL CONTACT RESISTANCE: 10 MilliOHMS Max.
COAXIAL CONTACT RESISTANCE: 2.7 MilliOHMS Max.
COAXIAL PINS: 50 OHM
SIGNAL CONTACT CURRENT RATING: 5 AMPS

MECHANICAL:
CONTACT INSERTION FORCE: 4.5 Kg Max.
CONTACT SEPARATOR FORCE: 0.3Kg Min.

MATERIALS:
CONTACTS: BRASS
INSULATOR: PBT UL94V-0 RATED,
230°C PROCESS TEMP.
SHELL: STEEL

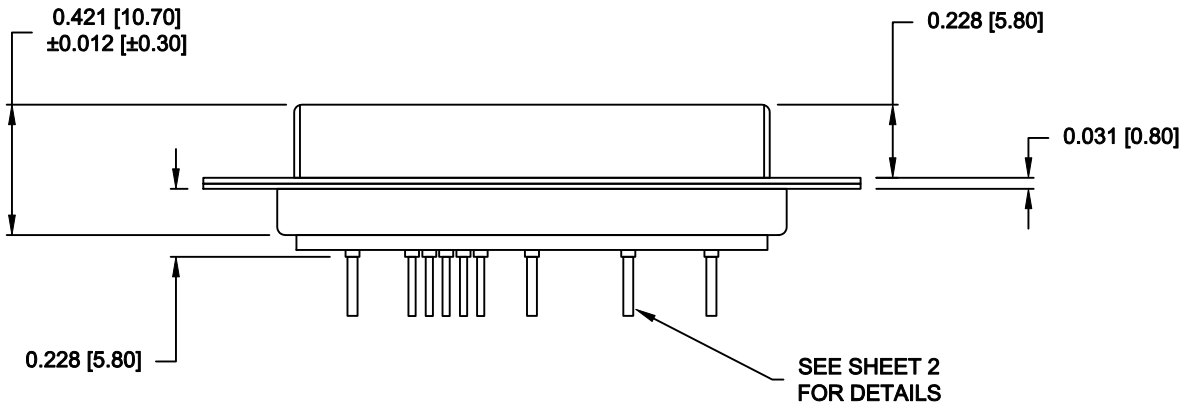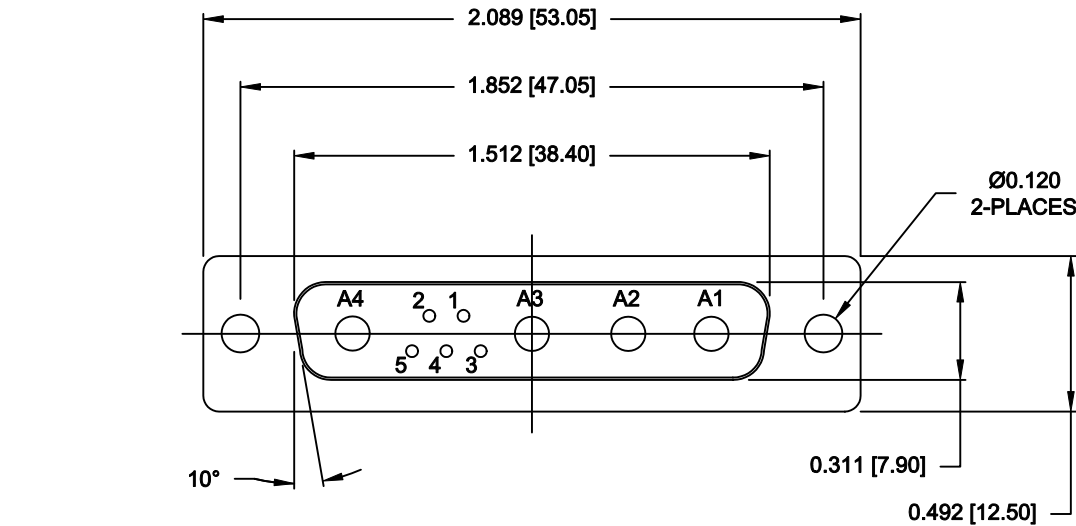

FINISH:
SHELL: NICKEL
CONTACTS: FULL GOLD FLASH





683M9W4203L001

00 = 50 OHM COAXIAL

RoHS COMPLIANT

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: M. SIGMON		DATE: 03-13-15	
		CHECKED:		DATE:	
		SCALE: 1.5 = 1	SHEET 1 OF 2		REV 0
		DWG NO. 683M9W4203L001			

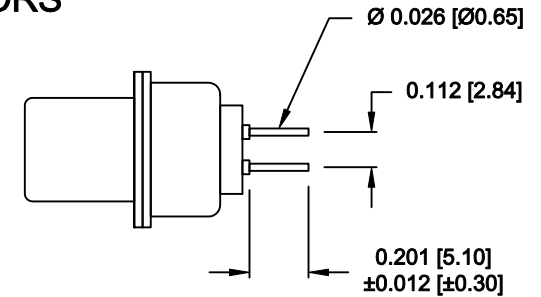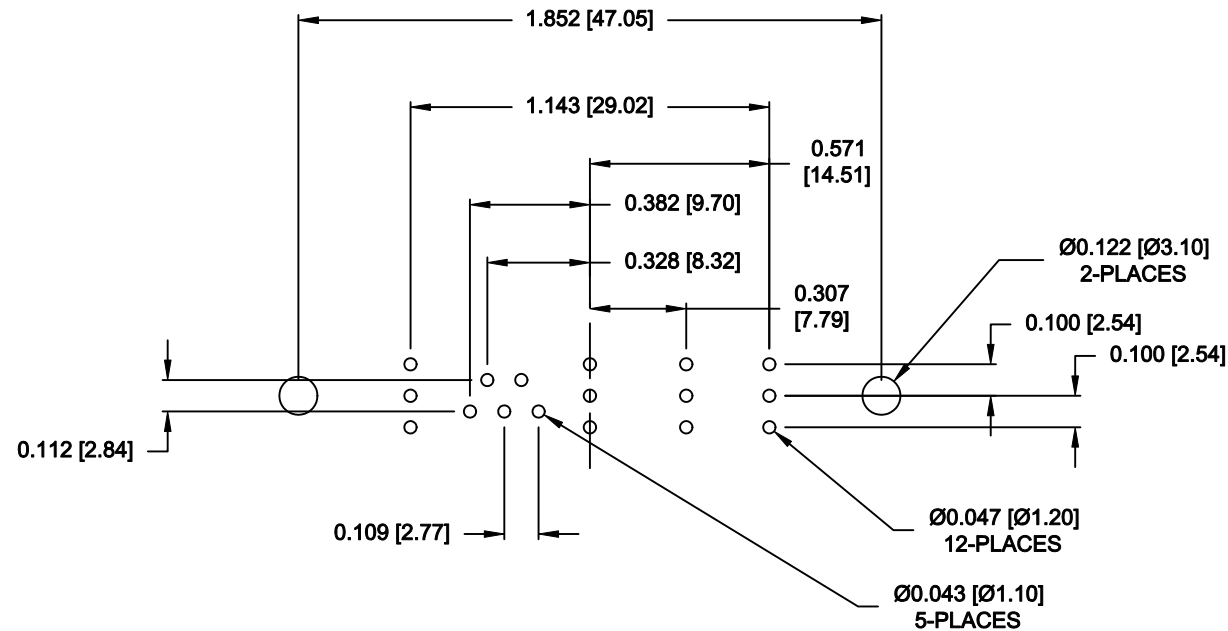

Technical drawing of a mechanical part with dimensions:

- Ø 0.031 [0.80]
- 0.100 [2.54]
- 0.100 [2.54]
- 0.201 [5.10]
- ±0.012 [±0.30]

50 OHM COAXIAL CONTACT

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:	M. SIGMON
--------	------------------

DATE:	03-13-15
-------	----------

CHECKED:

DATE:

SCALE:
1.5 = 1

SHEET	OF
2	2

REV
0

DWG NO.	
---------	--

683M9W4203L001

NorComp