


Selector Settings Knob

TOOLING INSTRUCTIONS	
1.	FOLLOW DMC AFM8 DATASHEET INCLUDED WITH THIS PRODUCT
2.	USE POSITIONER INCLUDED (K2175)
3.	USE SELECTOR SETTINGS SHOWN ON POSITIONER DEPENDANT ON WIRE AWG USED
4.	7mm WIRE STRIP DISTANCE IS RECOMMENDED // PUSH STRIPPED WIRE FULLY INTO CONTACT BEFORE CRIMPING

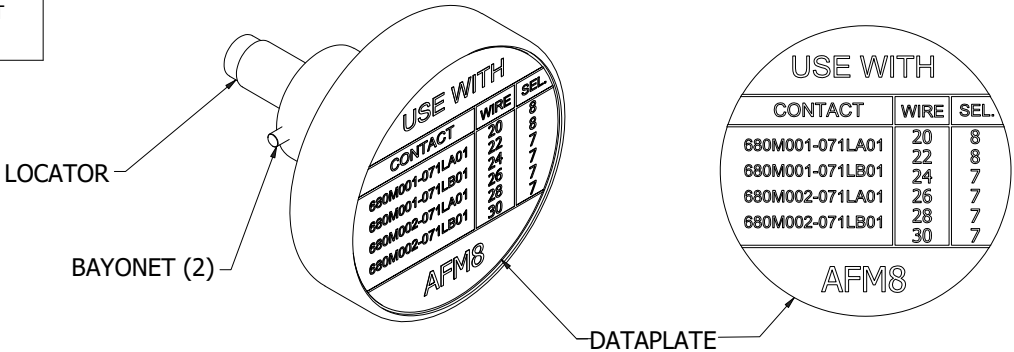

LOCATOR

BAYONET (2)

DATAPLATE

USE WITH

CONTACT	WIRE	SEL.
680M001-071LA01	20	8
680M001-071LB01	22	8
680M002-071LA01	24	7
680M002-071LB01	26	7
	28	7
	30	7

AFM8

RoHS COMPLIANT

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: J. KADEL

DATE: 03/15/2024

NorComp

SCALE: NTS

SHEET 1 OF 1

REV 2

DWG NO. 680M702-071-002