

DESCRIPTION: 1P // QUIK-LOQ // SOCKET // PANEL MOUNT // 1X NUTS // SOLDER CUP




SPECIFICATIONS:

MATERIALS:

HOUSING:	ABS+PC
NUT:	NICKEL PLATED BRASS
CONTACTS:	7u" GOLD PLATED BRASS OVER 196u" NICKEL MIN.
INSULATOR:	PPS (HIGH TEMPERATURE)

MECHANICAL:

MATING CYCLES:	2000 CYCLES
OPERATING TEMPERATURE:	-20°C TO +120°C
PROCESS TEMPERATURE:	260°C FOR 5 SECONDS
IP RATING:	50
MAX TORQUE VALUE:	0.7 Nm

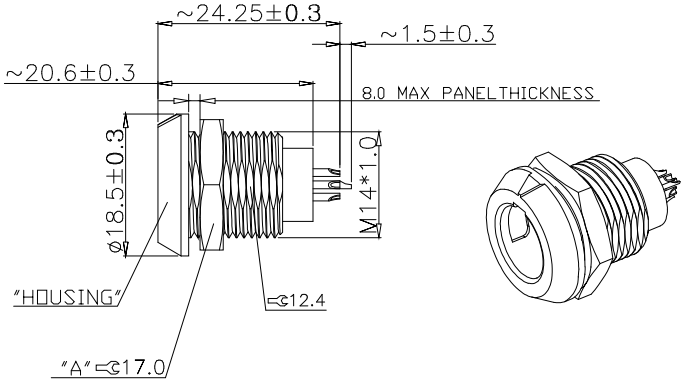

8P1PYYYY200YRF01

SERIES
KEY (SEE "KEY CHART")
0 = 0° KEY
POSITIONS
YY = SEE "POSITION CHART"
HOUSING COLOR
G = GREY
N = BLACK

POSITION CHART // ELECTRICAL/WIRE SPECIFICATIONS						
*solder side view of insulator						
POSITIONS (YY)	CONTACTS*	CONTACT Ø	MAX CONTACT mΩ	WORKING VOLTAGE	MAX AMPERAGE	MAX WIRE AWG
02		1.30mm	5.0 mΩ	400 V	10.0 A	20
03		1.30mm	5.0 mΩ	400 V	10.0 A	20
04		0.90mm	6.0 mΩ	400 V	8.0 A	22
05		0.90mm	6.0 mΩ	350 V	7.0 A	22
06		0.70mm	7.5 mΩ	350 V	6.0 A	24
07		0.70mm	7.5 mΩ	350 V	5.0 A	24
08		0.70mm	7.5 mΩ	350 V	5.0 A	24
09		0.50mm	10.0 mΩ	280 V	3.0 A	28
10		0.50mm	10.0 mΩ	280 V	3.0 A	28
12		0.50mm	10.0 mΩ	200 V	2.0 A	28
14		0.50mm	10.0 mΩ	200 V	2.0 A	28

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
M. SIGMON

DATE:
10/04/2016

UNITS = mm

DO NOT SCALE FROM DRAWING

NorComp

SCALE:
NTS

SHEET 1 OF 1

REV 3

DWG NO.

8P1PYYYY200GRF01