

DESCRIPTION: CONNECTOR FOR 991 SERIES BACK SHELL KIT



No. OF PINS	DIMENSIONS		
	A	B	C
50	1.545 [39.30]	1.399 [35.60]	0.373 [9.50]
68	1.989 [50.60]	1.846 [46.95]	0.366 [9.30]

MATERIAL:

HOUSING: THREMOPLASTIC, BLACK, P.B.T. UL94V-0
CONTACTS: PHOSPHOR BRONZE, GOLD SELECTIVE PLATED
FRONT SHELL: STEEL, NICKEL PLATED OVER COPPER

ELECTRICAL:


CURRENT RATING: 1 AMPS
INSULATOR RESISTANCE: 500 MEGOHMS Min.
DIELECTRIC WITHSTANDING: 500VAC
CONTACT RESISTANCE: 35MilliOhms Max.
OPERATING TEMPERATURE: -55° ~ +105° C

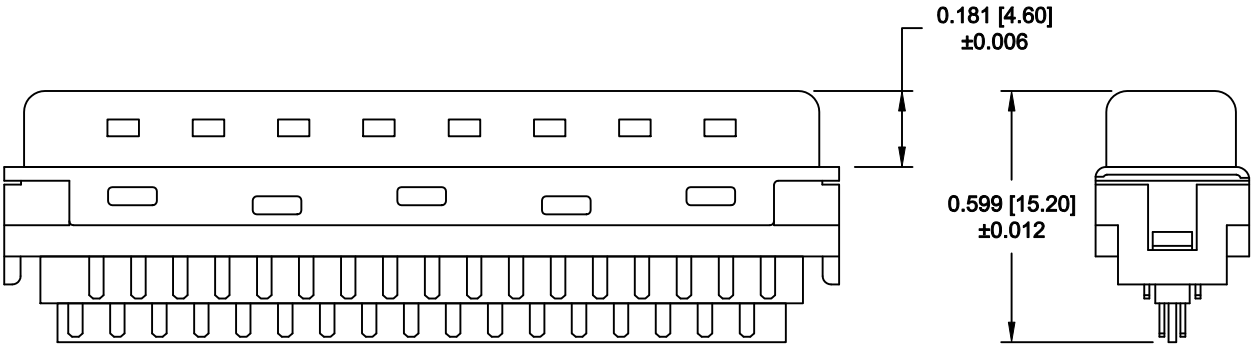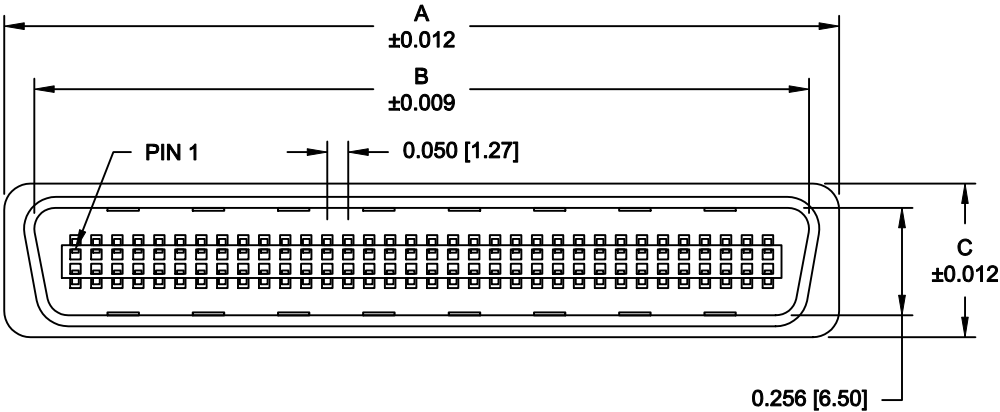

114-YYY-103L001

SERIES _____
POSITIONS _____
050 _____
068 _____
GENDER _____
1 = MALE _____
TERMINATION _____
0 = SOLDER _____
SHELL PLATING _____
3 = NICKEL PLATED _____
RoHS COMPLIANT (LOW TEMP. PROCESS) _____
HARDWARE OPTIONS _____
00 = NO HARDWARE _____
PLATING OPTIONS _____
1 = GOLD FLASH _____

DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: C. SMITH		DATE: 04-02-08	
		CHECKED:		DATE:	
			SCALE: 2 : 1	SHEET 1 OF 1	REV 2
			DWG NO. 114-YYY-103L001		

RoHS COMPLIANT