



DESCRIPTION: .050 Ribbon Plastic Backshell w/Spring Latches

	A	B	C	D
50	1.917	1.404	1.732	.504
	48.70	35.66	43.99	12.80

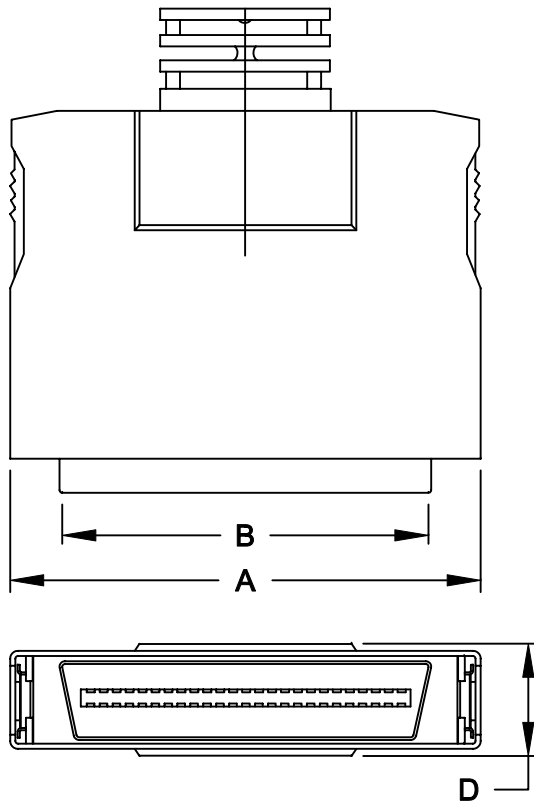

- Kit Includes:**
- (1) Male Solder Cup Connector
 - (2) Metal Shell Halves
 - (2) Spring Latches
 - (1) Plastic Housing Cover - Beige

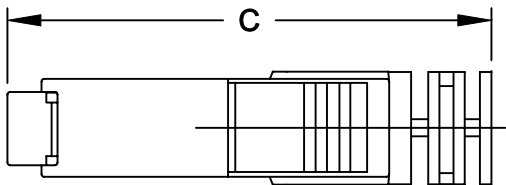

Materials:

Connector:

Insulator: High Temp plastic
U.L. rated 94V-0

Contacts: Copper Alloy

Shell: Steel

Backshell: Glass-Filled Thermoplastic. U.L. rated 94V-0

RoHS COMPLIANT

Electricals:

Contact current rating: 1.0 Amp
Dielectric Withstanding Voltage: AC 500 V r.m.s.
Insulation Resistance: 500 MEGOHMS Min.
Contact Resistance: 25 MILLIOHMS Max.
Operating Temperature: -55°C to + 105°C



THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF NorComp AND
SHALL NOT BE REPRODUCED, COPIED
OR USED AS THE BASIS FOR THE
MANUFACTURE OF SALE OF APPARATUS
WITHOUT WRITTEN PERMISSION.

NorComp

DRAWN:
WAYNE ROBBINS

DATE:
9-21-05

CHECKED:

DATE:

SCALE:
1:2

SHEET **1** OF **1**

REV
1

DWG NO.
990-XXX-010L091